

Oleodinamica 2MP MVS-06-FD-45-10 CETOP 3 flow divider-combiner sandwich valve

Manufacturer: Oleodinamica 2MP
Manufacturer part number / published order designation: MVS-06-FD-45-10
Published model: MVS-06-FD-45-10

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions


Actual selected supplier manufacturer article number MVS-06-FD-45-10 is reconciled to the factory MV_06-FD-__-10 legend: S=steel,45=inlet flow up to45L/min,10=series. The original contains an ordering legend rather than a separately printed complete individual-code row. The dedicated two-page factory FD sheet is used; the DDFA inline family and current99pagecatalogue are not substitute technical documents.45L/min is maximum inlet flow; accuracy is a catalogue statement, not a supplied-unit calibration certificate.

Source-page index


Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: Dedicated original FD drawing, circuit, selected45flow legend, operating pressure and performance curves.

Original pages	Compiled pages	Relevant content
1-2	2-3	Dedicated original FD drawing, circuit, selected45flow legend, operating pressure and performance curves.





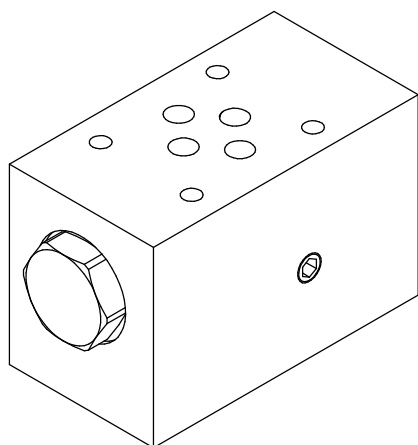


Schema idraulico
 Hydraulic diagram

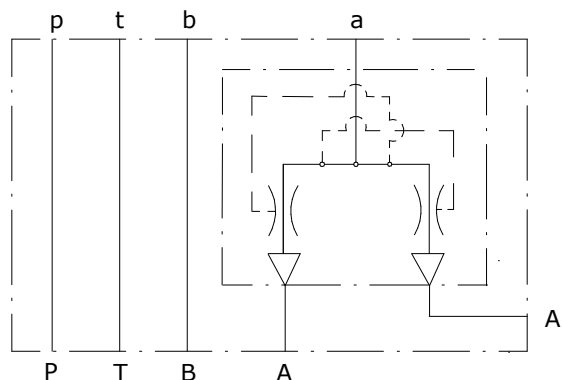

O-Ring side


n°4 OR 108

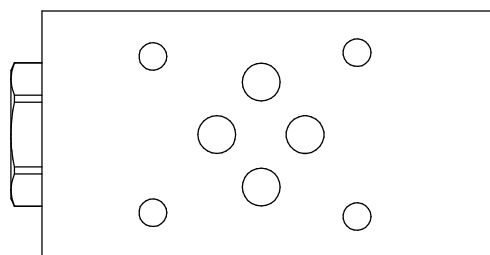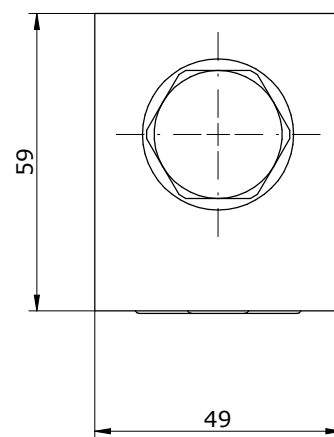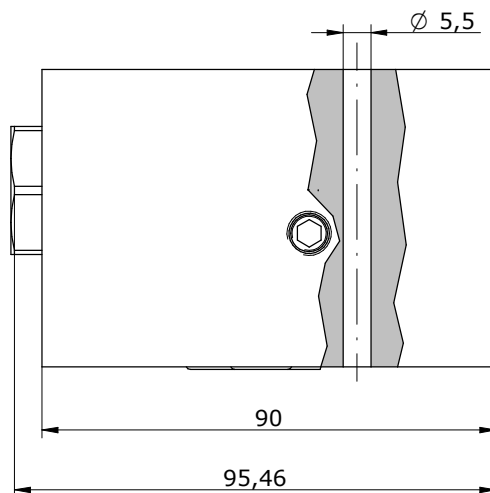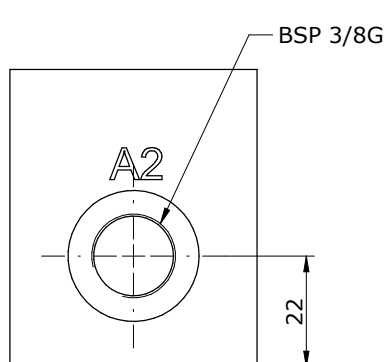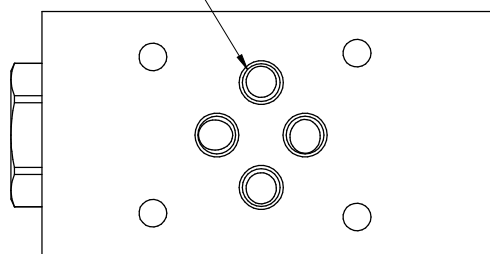

CARATTERISTICHE TECNICHE

CHARACTERISTICS

PERFORMANCE

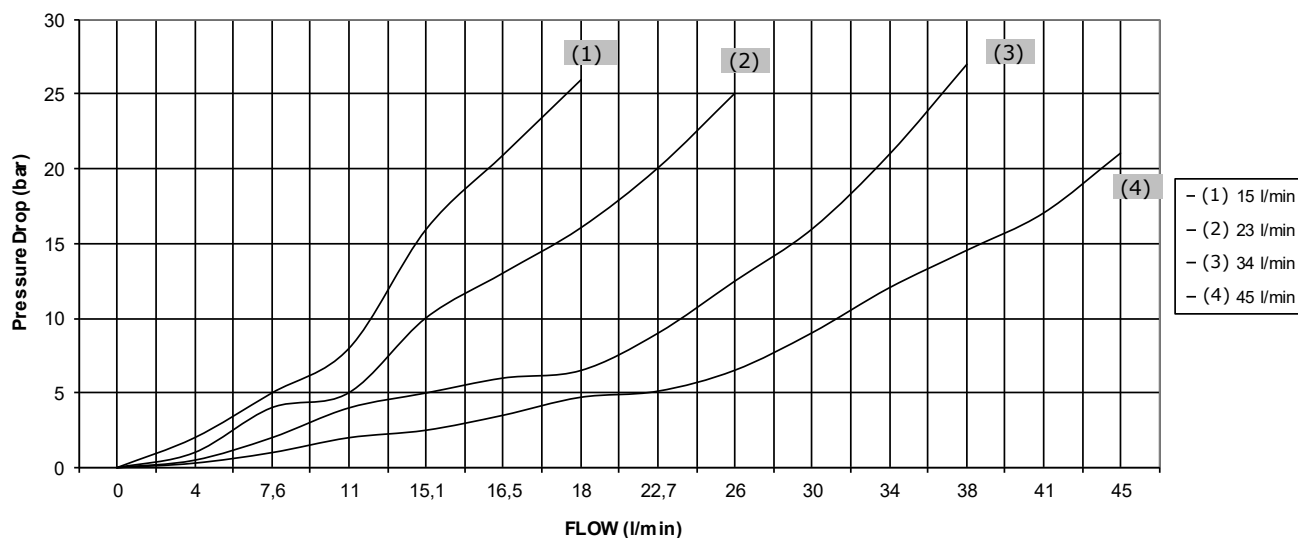

Operating pressure: 345 bar

Accuracy: $\pm 5\%$

MV_ 06 - FD - _ - 10

S = STEEL

INLET FLOW:

15 = UP TO 15 l/min

23 = UP TO 23 l/min

34 = UP TO 34 l/min

45 = UP TO 45 l/min