




316 S.S. Low pressure valve with solenoid normally open

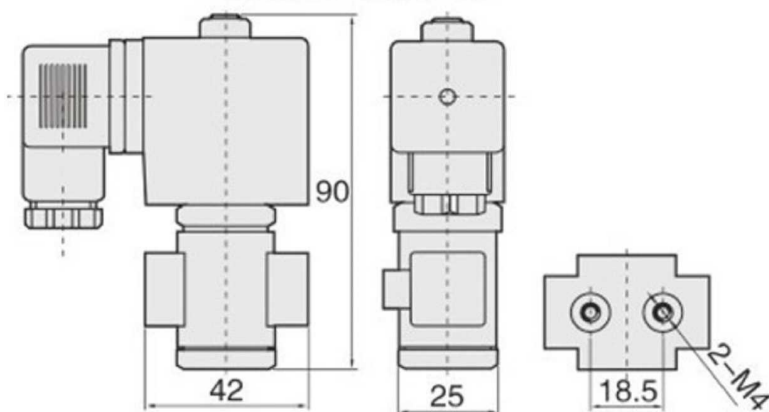

Z VCBP14NA:

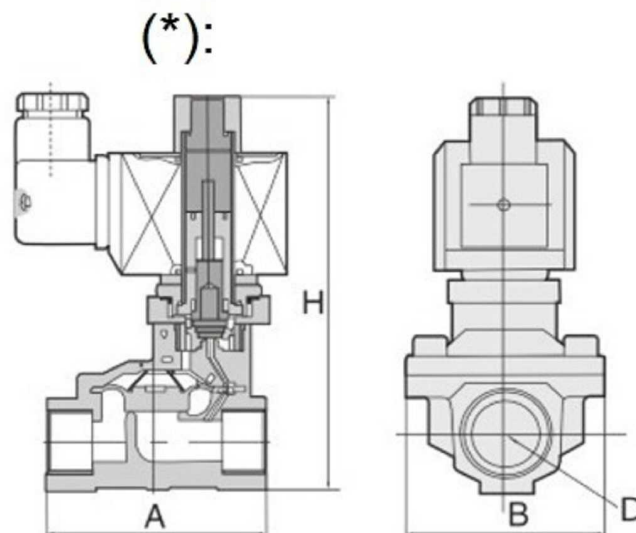

Max. Temperature: 120°C

Joints: FKM

Part n°	R1	Min. Press. (bar)	Voltage (V)	AIR MAX. PRESSURE (bar)	A	B	H
Z VCBP14NA12CC	1/4" BSP	0	12 VDC	20	-	-	-
Z VCBP38NA12CC	3/8" BSP	0,5	12 VDC	13	66	48	124
Z VCBP12NA12CC	1/2" BSP	0,5	12 VDC	13	66	48	124
Z VCBP14NA24CC	1/4" BSP	0	24 VDC	20	-	-	-
Z VCBP38NA24CC	3/8" BSP	0,5	24 VDC	13	66	48	124
Z VCBP12NA24CC	1/2" BSP	0,5	24 VDC	13	66	48	124
Z VCBP14NA24CA	1/4" BSP	0	24 VAC	20	-	-	-
Z VCBP38NA24CA	3/8" BSP	0,5	24 VAC	13	66	48	124
Z VCBP12NA24CA	1/2" BSP	0,5	24 VAC	20	66	48	124
Z VCBP14NA110CA	1/4" BSP	0	110 VAC	20	-	-	-
Z VCBP38NA110CA	3/8" BSP	0,5	110 VAC	13	66	48	124
Z VCBP12NA110CA	1/2" BSP	0,5	110 VAC	16	66	48	124
Z VCBP14NA220CA	1/4" BSP	0	220 VAC	13	-	-	-
Z VCBP38NA220CA	3/8" BSP	0,5	220 VAC	13	66	48	124
Z VCBP12NA220CA	1/2" BSP	0,5	220 VAC	13	66	48	124

(*) Image on the right: rest of references different from VCBP14NC.