
Connectors




	CONC1	CONC3
Max. Voltage	250V AC / 300V DC	250 V AC/DC
Max. Current	16 A	10 A
Operating current	10 A	-
Spacing	11 mm	18 mm
Protection class	IP 65	IP 65
	EN 60529	(DIN 43650A)
	(DIN 40050)	ISO 4400
Working temperature	-40º /+125ºC	-40º /+100ºC
Earth position	H6 - H12	H12

CONC1

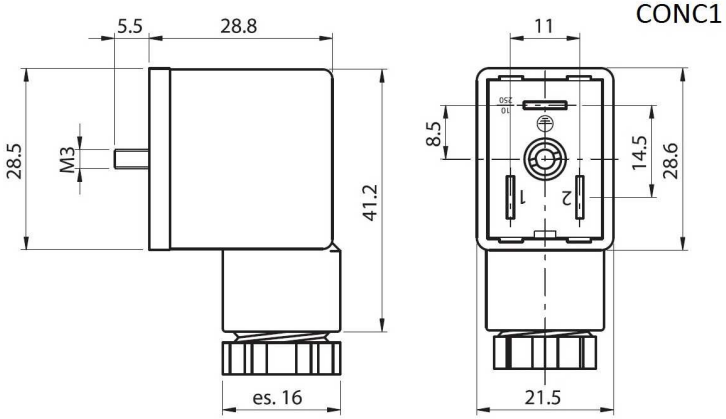

CONC3

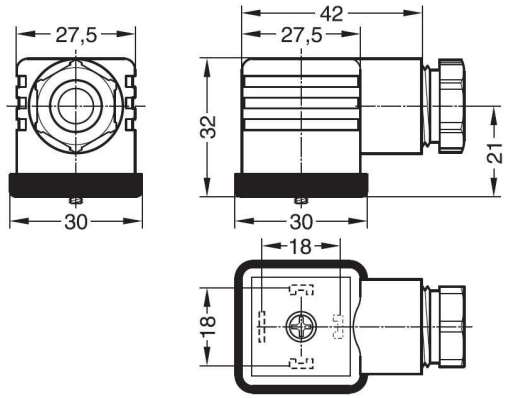

Part nº	Details
CONC1	CC/CA 21,5x28,8x41,2
CONC3	Standard DIN43650 30x32x42

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.