


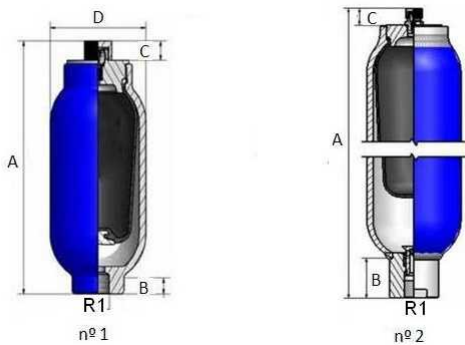

- Maximum standard nitrogen preload:** Maximum standard nitrogen preload-150 Bar
For different preloads, please consult us.
- Body:** made in painted carbon steel
- Working temperature:** from -20°C to +80°C
- Compression ratio:** recommended-P2/P0=2.5; maximum-P2/P0=4
- According to:** 97/23/CE-PED; 94/9/CE-ATEX Group II Cat 2; ASME VIII div.1; GOST-R; SELO.
- Nitrogen load valve thread:** 5/8" UNF

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Nitrogen vol. (l)	Image nº	A	B	C	D
HTR 10	1"1/4 BSP	300	210	10	2	760	80	15	170