
# Adjustable monocontact pressure switch K4 serie- N.C.



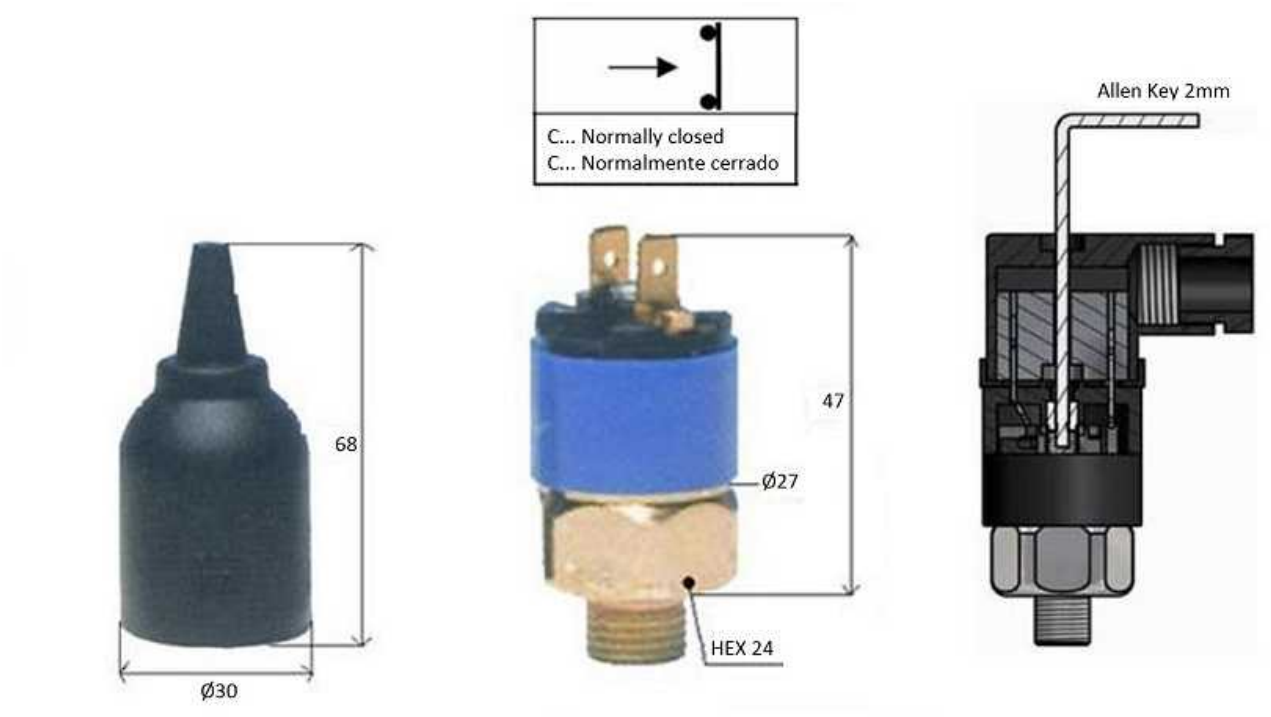


**Body:** 24 mm hexagonal in zinc-plated carbon steel
**Working temperature:** from - 20ºC to + 80ºC
**Switching frequency:** 200 cycles/min
**Operating point:** adjustable through an external screw
**Adjustment setting:** with Allen key 2 mm
**Electric Features:** Max. Load: 0.5 A at 250 VAC; 0.15 A at 110 VDC

| Part nº | R1 | Type | Max. Press. (bar) | Reg. rate (bar) | Execution |
|---|---|---|---|---|---|
| **K4RCF1** | 1/4" BSP | N.C | 25 | 0,2 - 2,5 | Membrana / Membrane |
| **K4SCF1** | 1/4" BSP | N.C. | 25 | 1 - 12 | Membrana / Membrane |
| **K4SPCF1** | 1/4" BSP | N.C. | 300 | 1 - 12 | Piston |
| **K4TCF1** | 1/4" BSP | N.C. | 200 | 5 - 50 | Piston |
| **K4VCF1** | 1/4" BSP | N.C. | 300 | 10 - 100 | Piston |
| **K4ZCF1** | 1/4" BSP | N.C. | 400 | 20 - 300 | Piston |

***** Review attached PDF*****

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*