Adjustable monocontact pressure switch K4 serie- N.O.

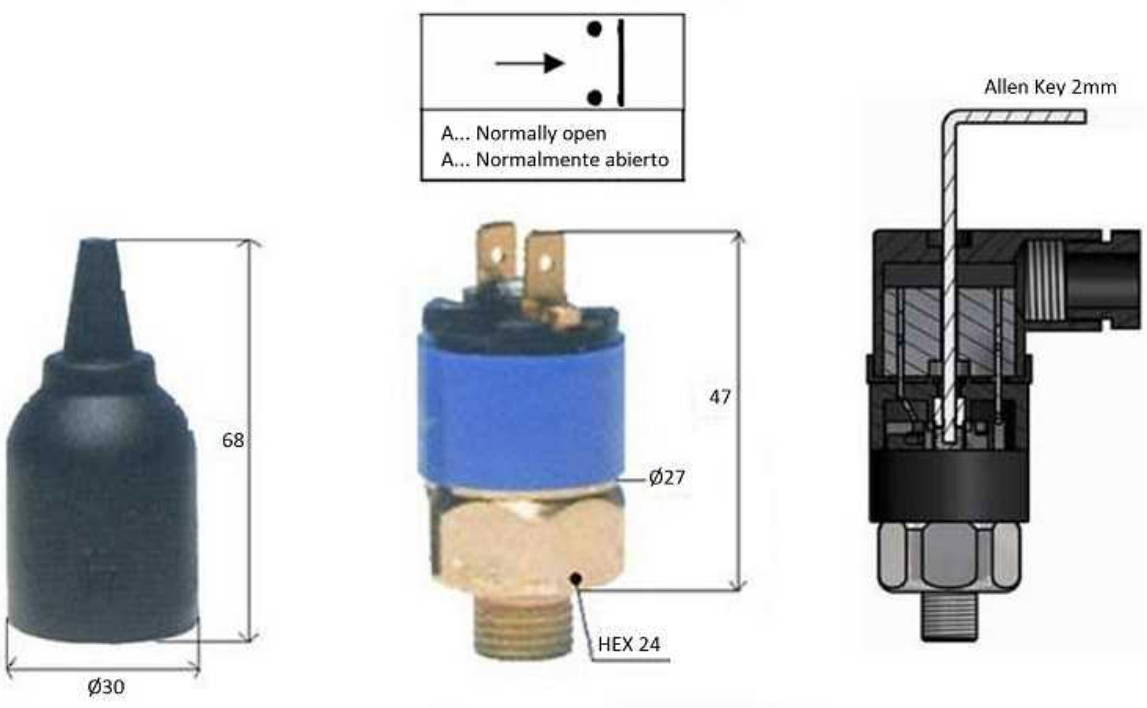

Body: 24 mm hexagonal in zinc-plated carbon steel
Working temperature: from - 20ºC to + 80ºC
Switching frequency: 200 cycles/min
Operating point: adjustable through an external screw
Adjustment setting: with Allen key 2 mm

Part nº	R1	Type	Max. Press. (bar)	Reg. rate (bar)	Execution
K4RAF1	1/4" BSP	N.A	25	0,2 - 2,5	Membrana / Membrane
K4SAF1	1/4" BSP	N.A.	25	1 - 12	Membrana / Membrane
K4SPAF1	1/4" BSP	N.A	300	1 - 12	Piston
K4TAF1	1/4" BSP	N.A.	300	5 - 50	Piston
K4VAF1	1/4" BSP	N.A.	300	10 - 100	Piston
K4ZAF1	1/4" BSP	N.A.	300	20 - 200	Piston

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.