


Adjustable piston pressure switch K5 serie





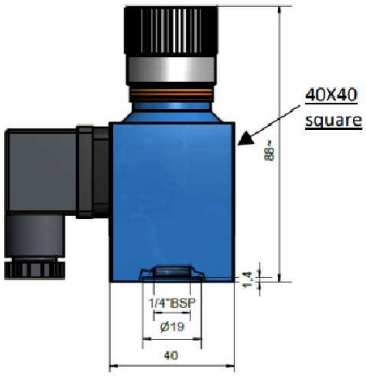

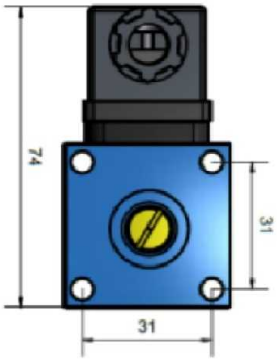

Body: square 40x40mm in anodized aluminium
Working temperature: from - 20ºC to + 80ºC
Switching frequency: 120 cycles/min
Electric Features: Max. Load: 5 Ampère at 250 VAC; 0,25 Ampère at 125 VDC
Hydraulic connection: 1/4" BSP-F o Cetop flange

Part nº	R1	Max. Press. (bar)	Reg. rate (bar)
K53P	1/4'' BSP	200	2 - 40
K54P	1/4'' BSP	300	5 - 100
K55P	1/4'' BSP	400	20 - 200
K57P	1/4'' BSP	500	30 - 300
K59P	1/4'' BSP	600	40 - 400

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.