




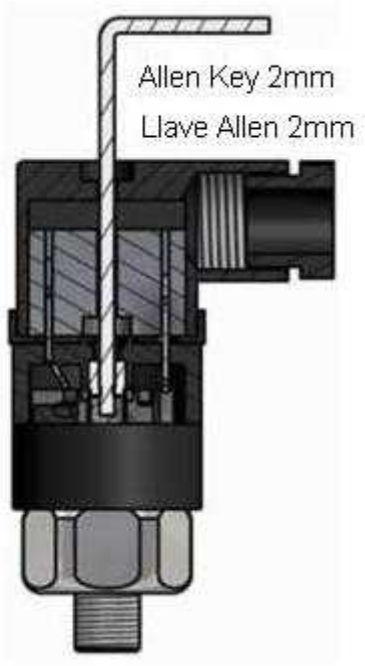

Body: 27 mm hexagonal in zinc-plated carbon steel
Working temperature: from - 20ºC to + 80ºC
Switching frequency: 90 cycles/min
Operating point: adjustable through an internal screw
Adjustment setting: with Allen key 2 mm
Electric Features: Max. Load: 0,5 Ampère at 250 VAC; 0,15 Ampère at 110 VDC

Part nº	R1	Max. Press. (bar)	Reg. rate (bar)
F31	1/4" BSP	25	1 - 10
F33P	1/4" BSP	300	5 - 50
F35P	1/4" BSP	300	10 - 100
F37	1/4" BSP	400	30 - 300

Metal body

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.