

Pressure switch

Adjustable pressure switch





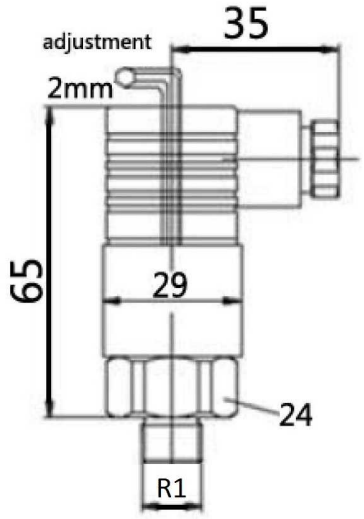

SET POINT= Pre-set factory value (Bar)

Part nº	R1	Max. Press. (bar)	P(IP)	Reg. rate (bar)	Execution	Setting (bar)
PTC25110	1/4" BSP	25	IP65	1 - 10 bar	Membrane	5
PTC300550	1/4" BSP	300	IP65	5 - 50 bar	Piston	25
PTC30010100	1/4" BSP	300	IP65	10 - 100 bar	Piston	45
PTC30030250	1/4" BSP	300	IP65	30 - 250 bar	Piston	110

***** Review attached PDF*****
-20ºC +90ºC
304 stainless steel
The hysteresis cycle is 15/25% of the set value

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.