

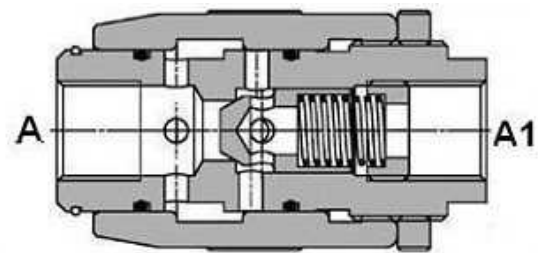


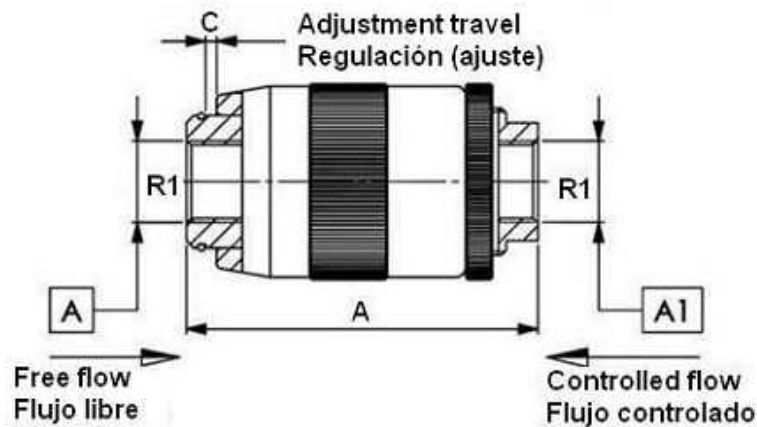

Materials: Body and internal parts are steel made. External surface zinc plated.
Rated flow: 150 l/min
Cracking Pressure: standard 0.5 bar, on request 2.5; 5; 10 bar

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D
FPMU 1/4	1/4" BSP	12	350	62	34	4,5	19
FPMU 3/8	3/8" BSP	30	350	72	40	5,5	24
FPMU 1/2	1/2" BSP	45	310	80	46	7	30
FPMU 3/4	3/4" BSP	85	280	100	54	10	36
FPMU 1	1" BSP	150	250	125	65	12	41