Aluminium bellhousing european format

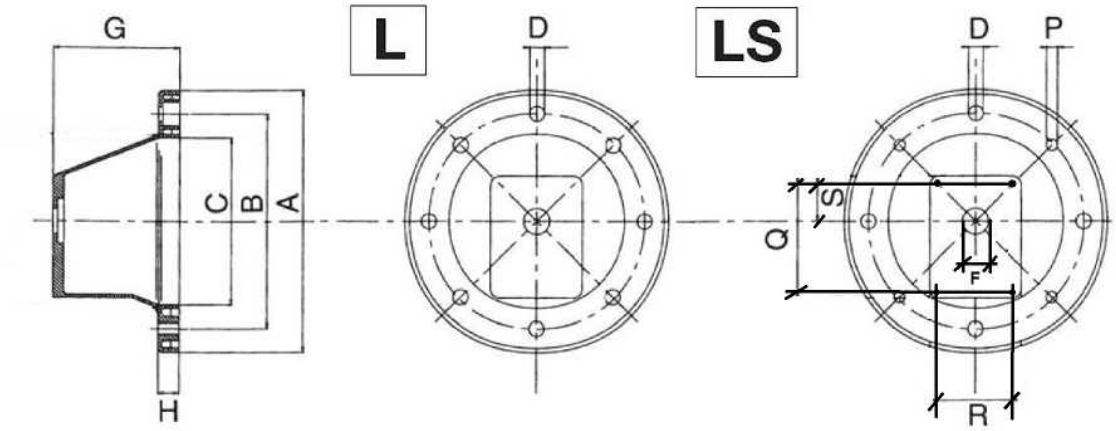

Part nº	Size	Motor side	Pump side	ØA	ØB	ØC	ØD	ØF	ØP	G	H	Q	R	S
LS141	140mm	0.16-0.25 CV/HP	GR 1	140	115	95	10	25,4	M8	60	11	72	52	34
LS161	160 mm	0.3-0.5 CV/HP	GR 1	160	130	110	10	25,4	M8	70	14	72	52	26.2
LS201	200 mm	0,75-2 CV/HP	GR 1	200	165	130	12	25,4	M10	95	15	72	52	26.2
LS250	250 mm	3-5,5 CV/HP	GR 1	250	215	180	14	25,4	M12	105	21	72	52	26.2
LS203	200 mm	0,75-2 CV/HP	GR 2	200	165	130	12	36,5	M10	95	15	96	71,5	32.5
LS252	250 mm	3- 5,5 CV/HP	GR 2	250	215	180	14	36,5	M12	105	21	96	71,5	32.5
LS300	300 mm	7,5-12,5 CV/HP	GR 2	300	265	230	14	36,5	M12	130	21	96	71,5	32.5
L3511	350 mm	15-30 CV/HP	GR 2	350	300	250	18	36,5	-	178	25	96	71,5	32.5
LS255	250 mm	3-5,5 CV/HP	GR 3	250	215	180	14	50,8	M12	115	21	128	98,5	42
LS302	300 mm	7,5-12,5 CV/HP	GR 3	300	265	230	14	50,8	M12	143	21	128	98,5	42
L3513	350 mm	15-30 CV/HP	GR 3	350	300	250	18	50,8	-	178	25	128	98,5	42
LS306	300 mm	7,5-12,5 CV/HP	GR 3.5	300	265	230	14	60,3	M12	143	21	149,5	114,3	49.5
L3507	350 mm	15-30 CV/HP	GR 3.5	350	300	250	18	60,3	-	188	25	149,5	114,3	49.5
LS355	350 mm	15-20 CV/HP	GR 3.5	350	300	250	18	60,3	M16	188	25	149,5	114,3	49.5
L4006	400 mm	40 CV/HP	GR 3.5	400	350	300	18	60,3	-	188	25	149,5	114,3	49.5
LSE356	350 mm	15-20 CV/HP	GR 3.5	350	300	250	18	60,3	M16	188	25	149,5	114,3	49.5

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.