

Hydraulic valves


Restrictor valves and hose breaks valves

Barrel flow control valve - unidirectional



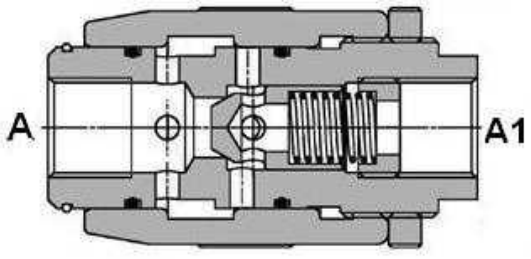



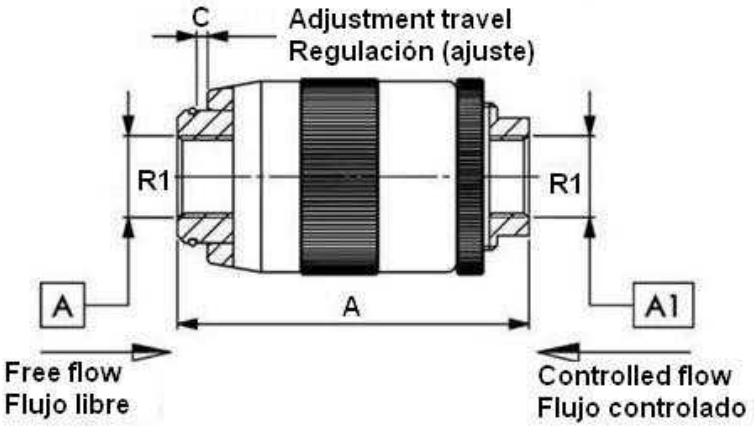

Materials: Body and internal parts are steel made. External surface zinc plated.

Cracking Pressure: standard 0.5 bar, on request 2.5; 5; 10 bar

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D
VT009004	1/4'' BSP	12	350	62	34	4,5	19
VT009006	3/8'' BSP	30	350	72	40	5,5	24
VT009008	1/2'' BSP	50	350	80	41	7	30

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.