
Bidirectional flow restrictor valve in line





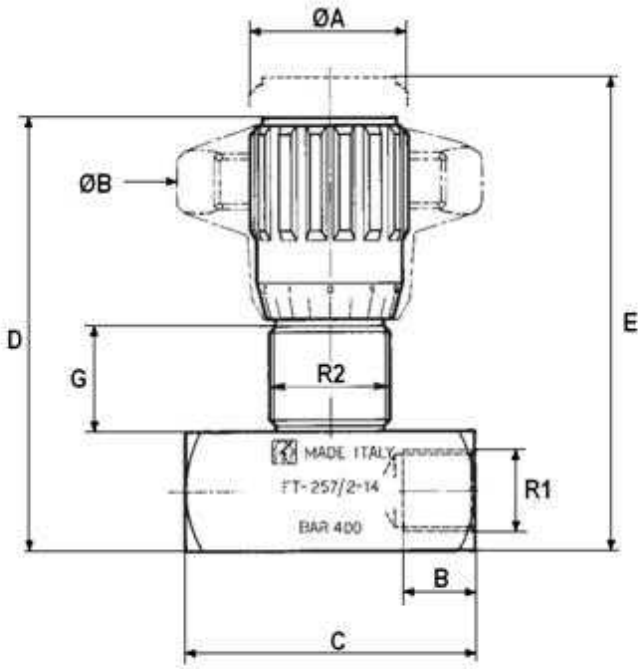

Working temperature: -20ºC \ 100ºC
Body: 9 S Mn Pb 23 - UNI 5105
Antiextrusion ring: PTFE

Part nº	R1	R2	Max. flow (l/min)	Max. Press. (bar)	Burst pressure (bar)	Filtration degree	ØA	ØB	B	C	D	E	G
FT2572B02	1/8" BSP	M17X1	8	400	1.600	25	Ø22	Ø40	8,5	38	59	64	13,5
FT2572B04	1/4" BSP	M20X1	14	400	1.600	25	Ø27	Ø50	12,5	49	71	78	17
FT2572B06	3/8" BSP	M25X1,5	38	400	1.600	25	Ø33	Ø70	12,5	59	84	93	19,5
FT2572B08	1/2" BSP	M30X1,5	54	400	1.600	25	Ø38	Ø80	15,5	68	97	107	21
FT2572B12	3/4" BSP	M40X1,5	180	400	1.600	25	Ø47	Ø100	17	86	120,5	132,5	26,5
FT2572B16	1" BSP	M50X1,5	200	320	1.300	25	Ø58	Ø120	20	105	151,5	167,5	35
FT2572B20	1" 1/4 BSP	M50X1,5	200	320	1.300	25	Ø58	Ø120	22	120	156,5	172,5	35
FT2572B24	1" 1/2 BSP	M55X2	210	320	1.300	25	Ø58	Ø120	24	134	167	181	35
FT2572B32	2" BSP	M65X2	200	320	1.300	25	Ø108	/	27	150	188	202	44

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.