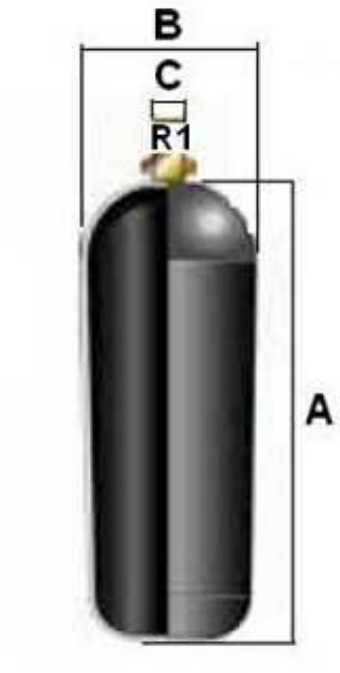


Maximum preload: 230 Bars
Material: NBR
Working temperature: from -20ºC to +80ºC
Compression ratio: recommended-P2/P0=2.5; maximum-P2/P0=4
According to: 97/23/CE-PED; 94/9/CE-ATEX Group II Cat 2; ASME-USTAMP; GOST-R; SELO.
SHB Bladder: R1=C

Part nº	R1	A	B	C
SHB2.5	5/8'' UNF	210	145	22,25
SHB4.5	5/8'' UNF	210	145	22,25
SHB6	5/8'' UNF	310	145	22,25

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.