

Proportional pressure relief valve

DBEM10-7X/100YG24K4M

Manufacturer: Bosch Rexroth

Manufacturer part number / published order designation: R901335402

Published model: DBEM10-7X/100YG24K4M

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

Actual delivered pressure adjustment not verified.

No unqualified response-time or IP rating assigned.

G24 external-coil voltage class is not promoted as an OBE supply voltage.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: Bosch Rexroth Dbeme Re29361 2013 Original

Original pages	Compiled pages	Relevant content
1-4	2-5	DBEM/DBEME family overview and archived publication edition; Exact 7X execution key: nominal size, pressure class, external Y return and 1600 mA coil; Exact electrical interface and seal key; actual variant hydraulic symbol; DBEM external-amplifier pilot relief and maximum-limiter function
6-8	6-8	Nominal size 10 hydraulic limits and HLP46 reference conditions; delivery-limiter settings are not claimed; 1600 mA coil limits, mineral-oil compatibility and operating qualifications; K4 external-amplifier connector assignment; alternative connector panels are contextual
10-11	9-10	Nominal size 10 flow-dependent minimum setting pressure; no constant minimum inferred; 1600 mA pressure-command and pressure-flow characteristics under printed conditions
13	11	Nominal size 10 subplate installation envelope for DBEM external electronics; other housing variant is contextual
19	12	Nominal size 10 mounting screws, subplates and separate-order external control electronics


Proportional pressure relief valve, pilot operated

Type DBEM and DBEME

RE 29361

Edition: 2013-07

Replaces: 2012-12

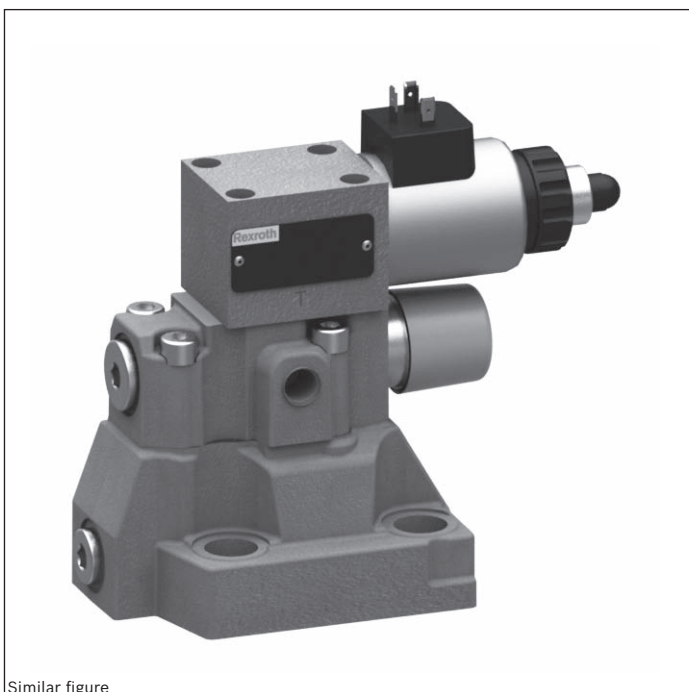

Similar figure

- ▶ Size 10 to 32
- ▶ Component series 7X
- ▶ Maximum operating pressure 350 bar
- ▶ Maximum flow: 700 l/min

Features

- ▶ Pilot operated valves for limiting a system pressure
- ▶ Operation by means of proportional solenoid
- ▶ For subplate mounting and threaded connection:
Porting pattern according to ISO 6264
- ▶ Maximum pressure limitation
- ▶ Valve and control electronics from a single source
- ▶ Integrated electronics (OBE) with type DBEME:
Little manufacturing tolerance of the command value
pressure characteristic curve
- ▶ External control electronics with type DBEM (separate order)

Contents

Features	1
Ordering code	2, 3
Symbols	3
Function, section	4, 5
Technical data	6, 7
Electrical connection	8, 9
Integrated electronics (OBE)	9
Characteristic curves	10 ... 12
Dimensions	13 ... 19
Accessories	19

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15
DBE	M				—	7X	/		G24					*

01	Proportional pressure relief valve	DBE
02	With maximum pressure limitation	M ¹⁾
03	For external control electronics	no code
	With integrated electronics (OBE)	E

Size

04	Size 10	10
	Size 25	20
	Size 32	30
05	Subplate mounting	no code
	Threaded connection	G
06	Component series 70 to 79 (70 to 79: Unchanged installation and connection dimensions)	7X

Pressure rating ²⁾

07	Up to 50 bar	50
	Up to 100 bar	100
	Up to 200 bar	200
	Up to 315 bar	315
	Up to 350 bar	350
08	Pilot oil return external	Y
	Unloading port X, pilot oil return external	XY

Supply voltage

09	24 V DC voltage	G24
10	1600 mA coil	no code
	800 mA coil	-8 ³⁾

¹⁾ The maximum pressure limitation only serves as protection against overpressure in case of an error in the pilot valve (e.g. in case of contamination or overcurrent).

²⁾ Special version DBEME-SO699 in size 10 and 20 available up to pressure rating 500 bar.

³⁾ Replacement for series 3X and series 5X SO1 (comparison see characteristic curve page 12). All characteristics (hydraulic and electric) specified in the data sheet refer to the version with 1600 mA coil.

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15
DBE	M				—	7X	/			G24				*

Electrical connection

11	For type DBEM:												
	Without mating connector; connector DIN EN 175301-803												
	For type DBEME:												
	Without mating connector; connector DIN EN 175201-804												
													K4 ⁴⁾
													K31 ⁴⁾

Electronics interface

12	Command value 0 to 10 V												
	Command value 4 to 20 mA												
	With DBEM												
													A1
													F1
													no code

Seal material


13	NBR seals												
	FKM seals												
	Attention: Observe compatibility of seals with hydraulic fluid used!												
													M
													V
14	Pipe thread to DIN ISO228-1												
	UNF-thread to ASME B1.1												
													no code ⁵⁾
													/12 ⁵⁾
15	Further details in the plain text												

4) Mating connectors, separate order, see page 8 and 19
5) possible only for version G


Symbols

For external control electronics:

Type DBEM...-7X/...Y...




Type DBEM...-7X/...XY...




With integrated electronics:

Type DBEME...-7X/...Y...



Type DBEME...-7X/...XY...



Function, section

Valves of type DBEM are pilot operated pressure relief valves. They are used to limit the operating pressure in hydraulic systems. By means of these valves, the pressure to be limited can be continuously adjusted depending on the electric command value.

These valves basically consist of the housing (1) with main spool insert (3), the sandwich plate valve with maximum pressure limitation (2) and the proportional pilot control valve (11).


Type DBEM...

The pressure applied to channel P acts on the main spool (3). At the same time, the pressure at port P is applied to the spring loaded side of the main spool (3) via the control lines (6, 7) provided with nozzles (4, 5). Via the connection bore (9), the pressure is simultaneously applied to the poppet (10) of the proportional pilot control valve (11). The hydraulic force at the pilot poppet (10) acts against the command value-dependent force of the proportional solenoid (12).

If the hydraulic force exceeds the solenoid force, the pilot poppet is opened (10). The pilot oil can now flow via the control line (13) into port Y (14) and to the tank; thus, a pressure drop results at the main spool (3) over the

control lines (6, 7). The connection from port P to T is released. The main spool (3) controls the set operating pressure at port P.

As hydraulic protection against inadmissibly high pressures, a spring-loaded pressure relief valve (2) has been integrated. This maximum pressure limitation is pre-set to the relevant pressure rating (see table page 6). In the operating range of the valve, the poppet (15) is held on the valve seat (17) by the spring (16) and is thus closed. If the pressure in the spring chamber of the main spool (3) exceeds the maximum admissible set pressure of the valve, the poppet (15) is pressed against the compression spring (16) and the connection into the spring chamber is opened. Via port Y (14), the pilot oil flows into the tank. Due to the control lines (6, 7), a pressure drop occurs at the main spool (3). The connection from port P to T is released. The main spool (3) controls the set maximum operating pressure in port P. Via the adjustment element (19), the pre-set pressure can be reduced, if necessary. Port Y (14) must be externally piped to the tank. The connection to the tank should be pressureless. Via port X (18), the valve may be unloaded or the maximum pressure may be limited.

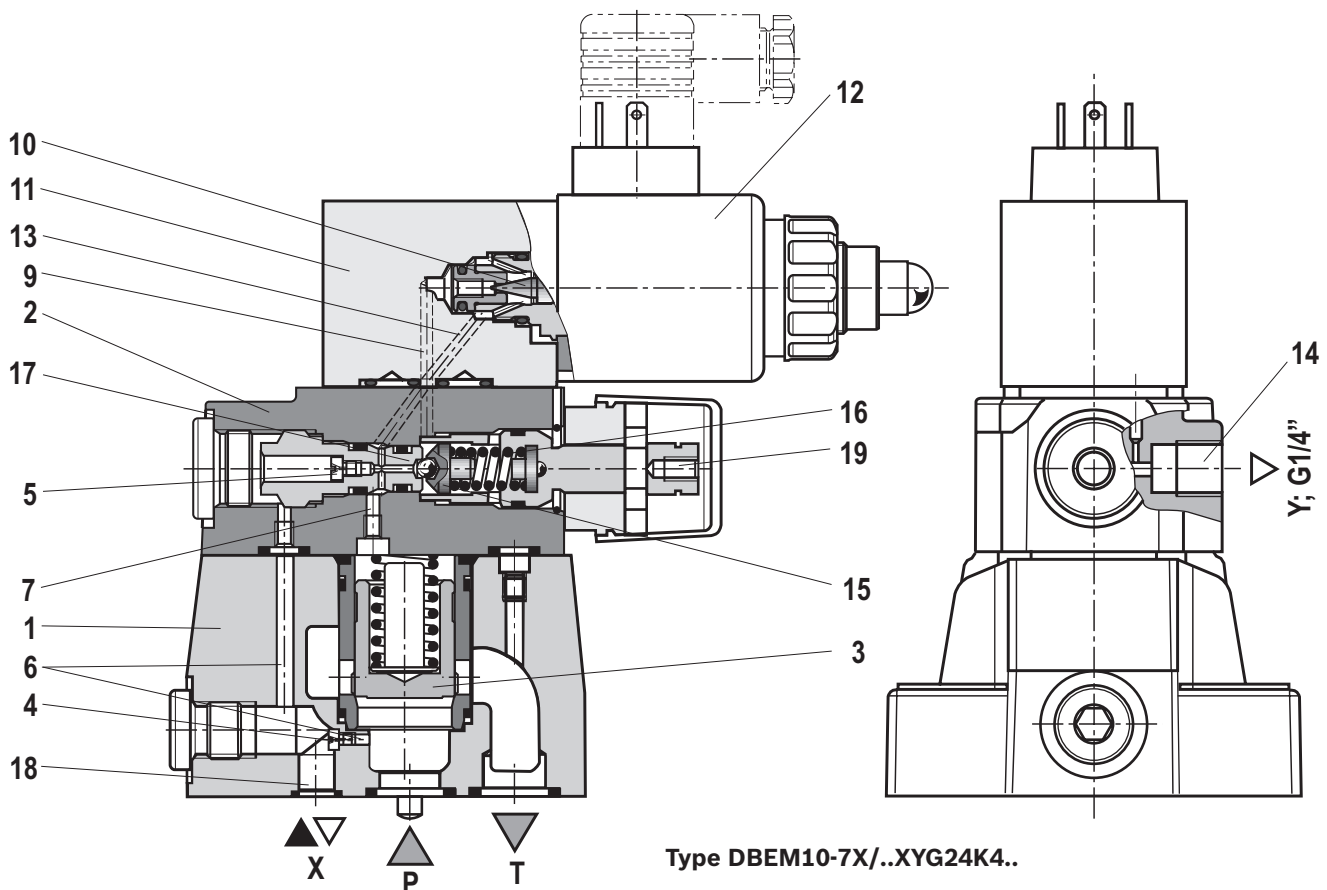

Technical data

(For applications outside these parameters, please consult us!)

general			Size 10	Size 25	Size 32
Weight	– Type DBEM	kg	4.5	5.3	6.4
	– Type DBEME	kg	4.7	5.5	6.6
	– Type DBEMG	kg	7	6,74	6.4
	– Type DBEMEG	kg	7,2	6,94	6.6
Installation position			Any		
Storage temperature range			°C –20 to +80		
Ambient temperature range	– Type DBEM	°C	–20 to +70		
	– Type DBEME	°C	–20 to +50		

hydraulic (measured with HLP46, $\vartheta_{oil} = 40 \pm 5$ °C)			Size 10	Size 25	Size 32
Maximum operating pressure	– Port P and X	bar	350		
	– Port T	bar	315		
	– Port Y	bar	Separately and to the tank at zero pressure		
Maximum set pressure	– Pressure rating 50 bar	bar	50		
	– Pressure rating 100 bar	bar	100		
	– Pressure rating 200 bar	bar	200		
	– Pressure rating 315 bar	bar	315		
	– Pressure rating 350 bar	bar	350		
Minimum set pressure with command value zero			bar See characteristic curve page 10		
Maximum pressure limitation, set upon delivery			If necessary, the value may be reduced		
	– Pressure rating 50 bar	bar	to 75 bar		
	– Pressure rating 100 bar	bar	to 135 bar		
	– Pressure rating 200 bar	bar	to 240 bar		
	– Pressure rating 315 bar	bar	to 350 bar		
	– Pressure rating 350 bar	bar	to 390 bar		
Maximum flow		l/min	275 ¹⁾	550	700
Pilot flow		l/min	0.4 to 1	0.4 to 1.5	0.4 to 1.5
Hydraulic fluid			See table page 7		
Hydraulic fluid temperature range			°C –20 to +80		
Viscosity range			mm ² /s 15 to 380		
Maximum permitted degree of contamination of the hydraulic fluid - cleanliness class according to ISO 4406 (c)			Class 20/18/15 ²⁾		
Hysteresis (see command value pressure characteristic curve)			% ≤ 5 of the maximum set pressure		
Linearity			% ±3.5 of the maximum set pressure		
Manufacturing tolerance of the command value pressure characteristic curve, related to the hysteresis characteristic curve; pressure increasing	– Type DBEM	%	±5 of the maximum set pressure		
	– Type DBEME	%	±1.5 of the maximum set pressure		
Step response $T_u + T_g$	10 % → 90 %	ms	~100	Measured with standing hydraulic fluid column, 0.2 liters at port A	
	90 % → 10 %	ms	~100		
Step response $T_u + T_g$	10 % → 90 %	ms	~200	Measured with standing hydraulic fluid column, 5 liters at port A	
	90 % → 10 %	ms	~200		

¹⁾ Version G to 200 l/min

²⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components. For the selection of the filters see www.boschrexroth.com/filter.

Technical data

(For applications outside these parameters, please consult us!)

Hydraulic fluid	Classification	Suitable sealing materials	Standards
Mineral oils and related hydrocarbons	HL, HLP	NBR, FKM	DIN 51524
Bio-degradable	– Insoluble in water	HETG	VDMA 24568
		HEES	
	– Soluble in water	HEPG	VDMA 24568
Flame-resistant	– Water-free	HFDU, HFDR	ISO 12922
	– Containing water	HFC	ISO 12922

**Important information on hydraulic fluids!**

- For more information and data on the use of other hydraulic fluids refer to data sheet 90220 or contact us!
- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.)!
- The flash point of the hydraulic fluid used must be 40 K higher than the maximum solenoid surface temperature.

- **Flame-resistant – containing water:** Maximum pressure differential per control edge 210 bar, otherwise, increased cavitation erosion. Life cycle as compared to HLP 30 to 100 %
Fluid temperature maximum 60 °C
- **Bio-degradable:** When using bio-degradable hydraulic fluids that are simultaneously zinc-solving, zinc may accumulate in the fluid (per pole tube 700 mg zinc).

electric		G24	G24-8
Minimum solenoid current	mA	≤ 100	≤ 100
Maximum solenoid current	mA	1600 ± 10 %	800 ± 5 %
Solenoid coil resistance	– Cold value at 20 °C	Ω	20.6
	– Maximum hot value	Ω	33
Duty cycle	%	100	100

electrical, integrated electronics (OBE)			
Supply voltage	– Nominal voltage	VDC	24
	– Lower limit	VDC	21
	– Upper limit	VDC	35
Current consumption		A	≤ 1.5
Required fuse protection		A	2, time-lag
Inputs	– Voltage	V	0 to 10
	– Current	mA	4 to 20
Output	– Actual current value	mV	1 mV ± 1 mA
Protection class of the valve according to EN 60529			IP 65 with mating connector mounted and locked

Caution!

At an ambient temperature of 70 °C and a duty cycle of 100 % with max. current, the coil reaches temperatures of up to 170 °C. Contact with the coil may lead to burns.


**Notice!**

Information on the environment simulation testing for the areas EMC (electromagnetic compatibility), see declaration on environmental compatibility data sheet 29162-U.


Electrical connection
(dimensions in mm)

Type DBEM



Connection at the connector



Connection at mating connector



Mating connector (black) according to DIN EN 175301-803
Material no. **R901017011**
(separate order)

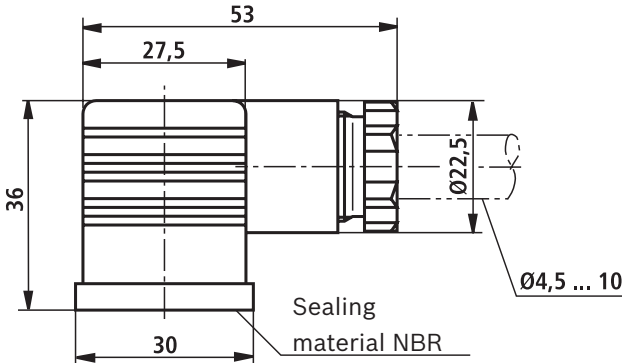


Type DBEME


Device connector allocation	Contact	Allocation interface "A1"	Allocation interface "F1"
Supply voltage	A	24 VDC (u(t) = 21 V to 35 V); I _{max} ≤ 1.5 A	
	B	0 V	
Reference potential actual value	C	Reference contact F; 0 V	Reference contact F; 0 V
Differential amplifier input	D	0 to 10 V; R _E = 100 kΩ	4 to 20 mA; R _E = 100 Ω
	E	Reference potential command value	
Measuring output (actual value)	F	0 to 1.6 V actual value (1 mV ± 1 mA) load resistance > 10 kΩ	
Protective earth	PE	Connected to solenoid and valve housing	

Mating connectors according to DIN EN 175201-804, solder contacts for line cross-section 0.5 to 1.5 mm²

Plastic version,
material no. **R900021267**
(separate order)

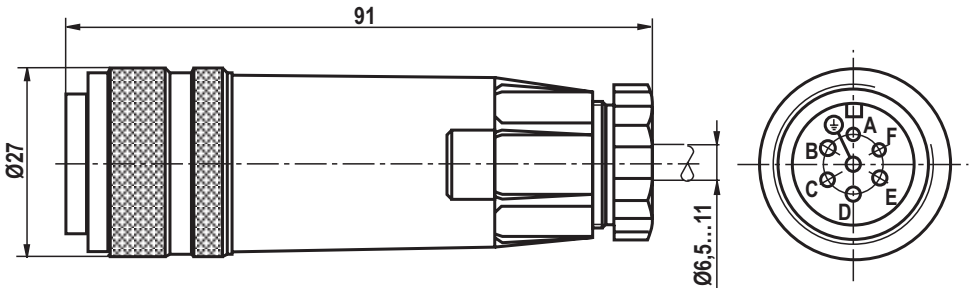



Metal version,
material no. **R900223890**
(separate order)

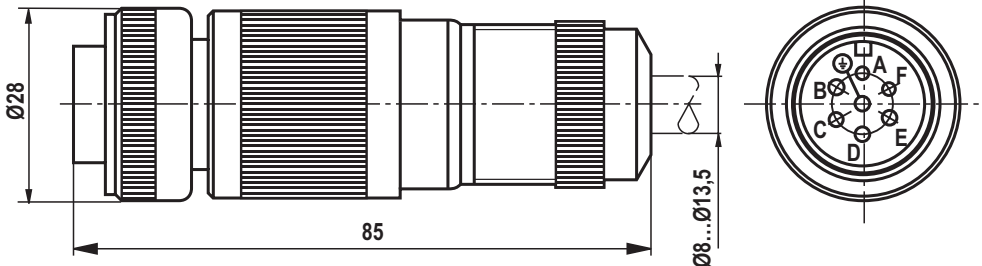

Characteristic curves

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Pressure in port P depending on the command value (flow = 24 l/min)

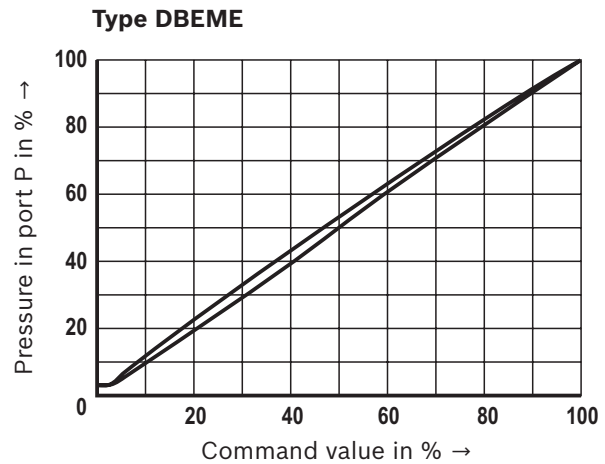
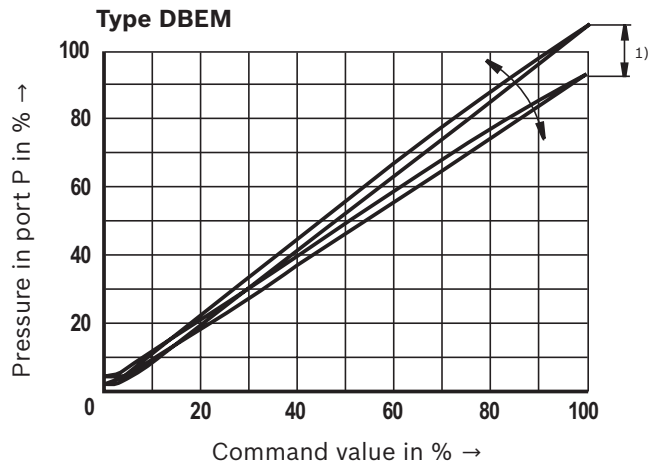


¹⁾ With valve type DBEM, the manufacturing tolerance at the **external amplifier** (type and data sheet see page 16) can be changed using the command value attenuator potentiometer "**Gw**". The digital amplifier is set using the parameter "Limit".

In this connection, the control current according to the technical data must not be exceeded.

In order to be able to adjust several valves to the same characteristic curve, don't set the pressure higher than the maximum set pressure of the pressure rating with command value 100 %.


Set pressure depending on the flow

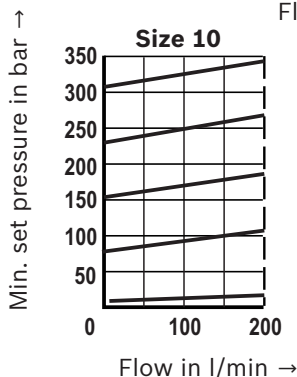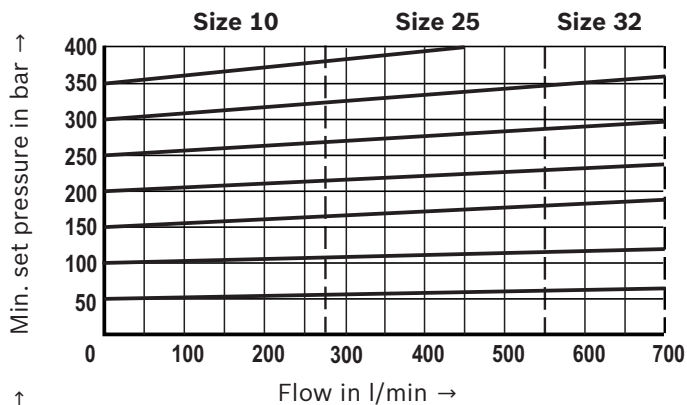

Version G







(Characteristic curves for size 25 and size 30 identical to version „subplate mounting“)

Min. set pressure with command value 0

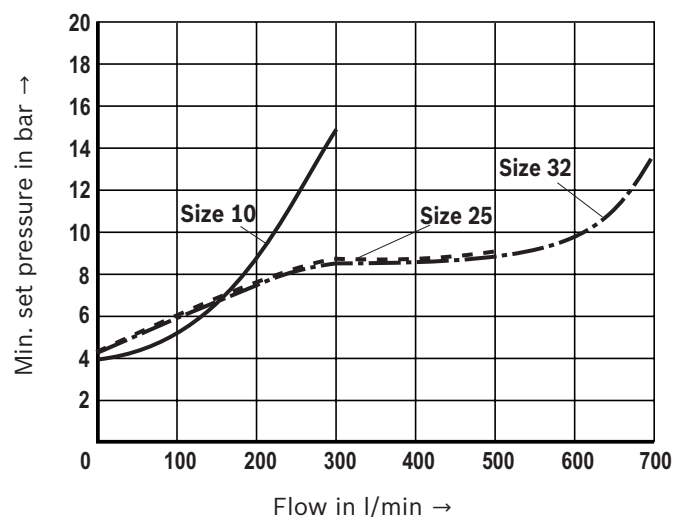


The characteristic curves apply to output pressure in T or Y = 0 bar in the total flow range.

Notice: So that the minimum set pressure is achieved, the pilot current must not exceed 100 mA.

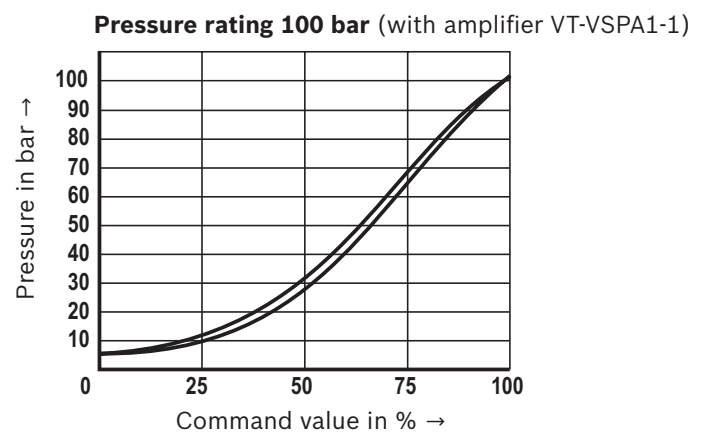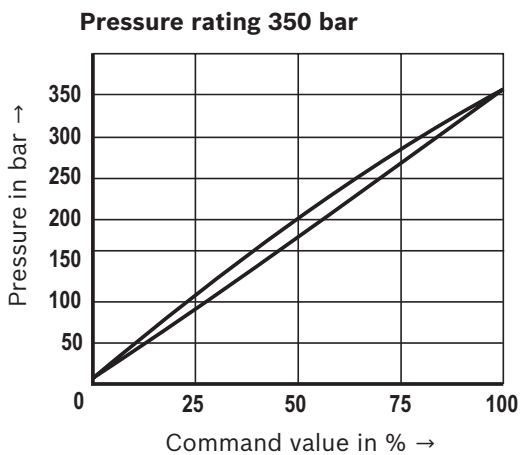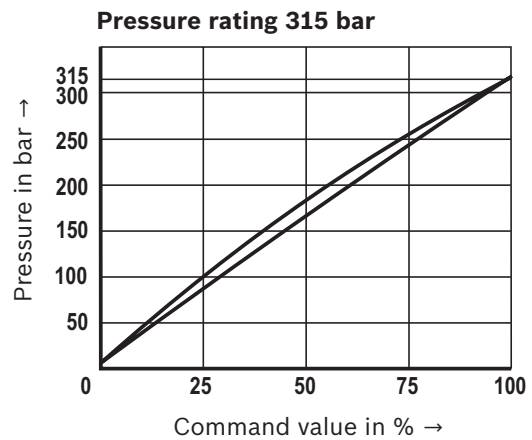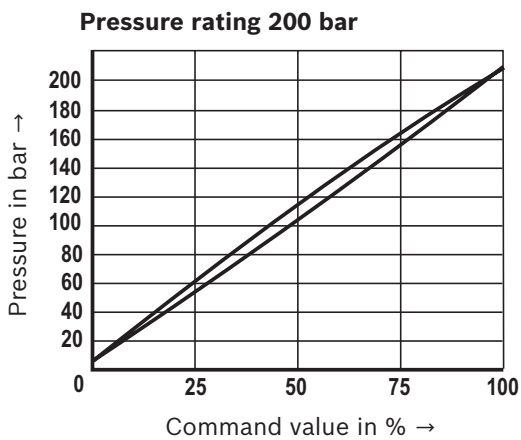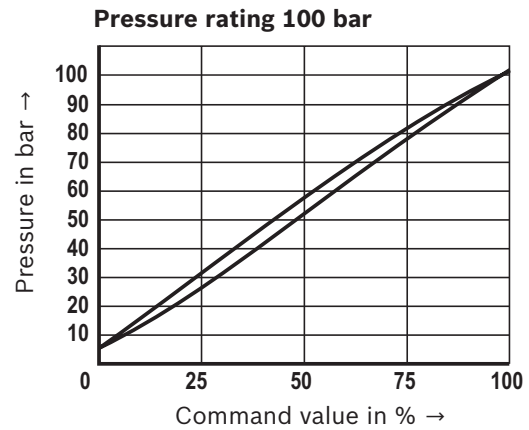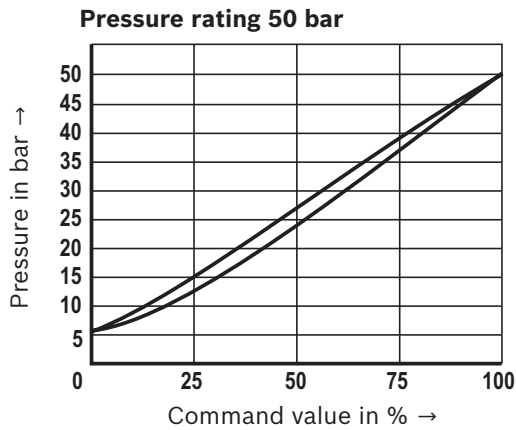
Characteristic curves(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)**Command value pressure characteristic curves** (measured with a flow of 24 l/min and with amplifier VT-MSPA1-1)

Dimensions: Type DBEM(E) 10

(dimensions in mm)

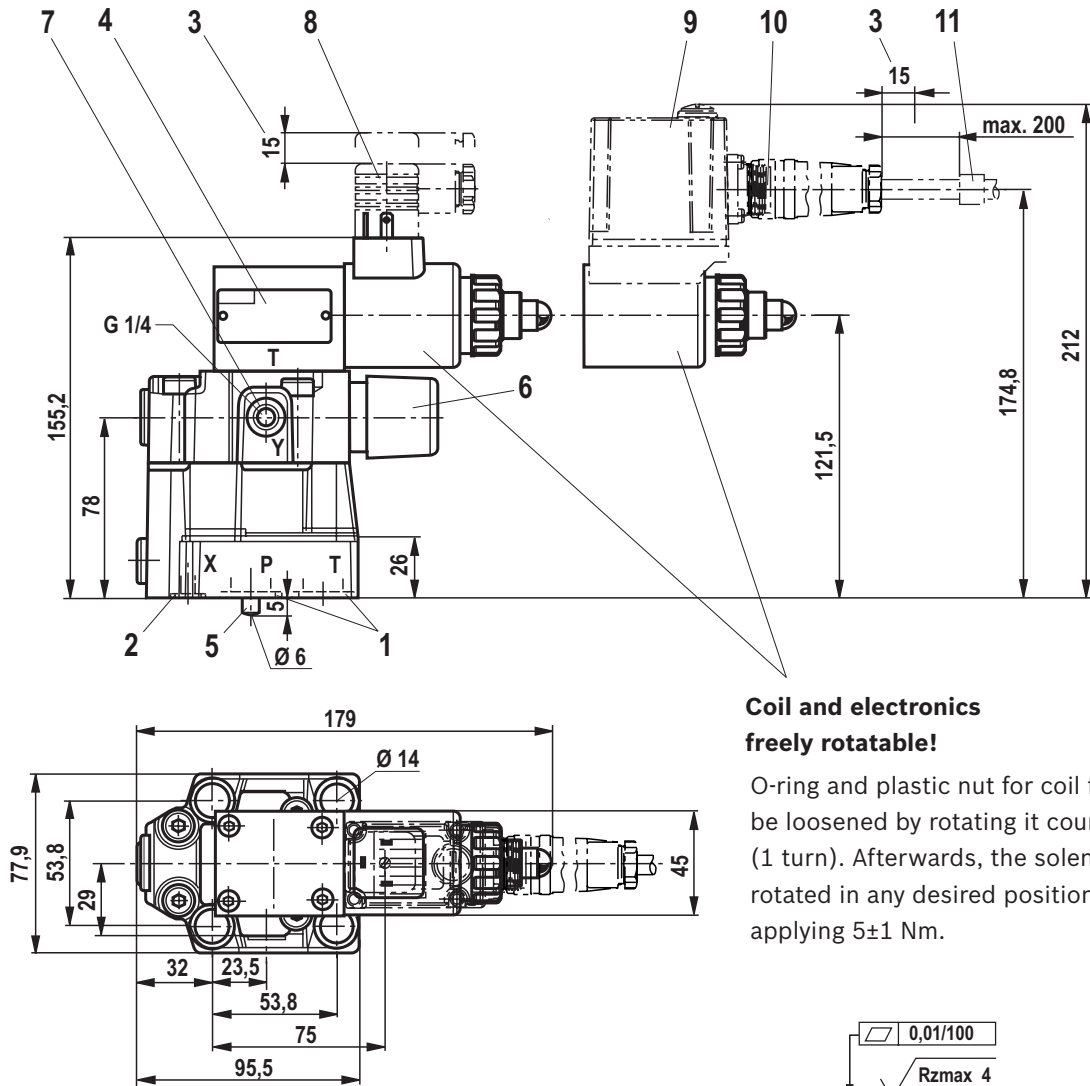**Coil and electronics
freely rotatable!**

O-ring and plastic nut for coil fixation. The nut can be loosened by rotating it counterclockwise (1 turn). Afterwards, the solenoid coil can be rotated in any desired position. Subsequent fixation applying 5 ± 1 Nm.



Required surface quality of the
valve contact surface

- 1 Seal rings for ports P and T
- 2 Seal ring for ports X
- 3 Space required to remove the mating connector
- 4 Name plate
- 5 Locating pin
- 6 Maximum pressure limitation
- 7 External pilot oil return,
separately and to the tank at zero pressure
- 8 Mating connector for type DBEM
- 9 Integrated electronics (OBE)
- 10 Mating connector for type DBEME
- 11 Cable fastening

Notice!

The dimensions are nominal dimensions which are subject to tolerances.

Valve mounting screws and **subplates** see page 19.

Dimensions

Hexagon socket head cap screws (separate order)		Material number
Size 10	4x ISO 4762 - M12 x 50 - 10.9-fIZn-240h-L Friction coefficient $\mu_{\text{total}} = 0.09$ to 0.14 ; Tightening torque $M_A = 75 \text{ Nm} \pm 10 \%$	R913000283
Size 25	4x ISO 4762 - M16 x 50 - 10.9-fIZn-240h-L Friction coefficient $\mu_{\text{total}} = 0.09$ to 0.14 ; Tightening torque $M_A = 185 \text{ Nm} \pm 10 \%$	R913000378
Size 32	4x hexagon socket head cap screw DIN 912 - M18 x 50 - 10.9-fIZnnc-240h-L Friction coefficient $\mu_{\text{total}} = 0.09$ to 0.14 ; Tightening torque $M_A = 248 \text{ Nm} \pm 10 \%$	R913031952

Notice: For reasons of stability, exclusively these valve mounting screws may be used. The tightening torque of the hexagon socket head cap screws refers to the maximum operating pressure!

Subplates	Data sheet	Material number
Size 10, 25, 32	45064	

Accessories

(not included in the delivery)

External control for type DBEM (only standard version G24)	Data sheet	Material number
VT-MSPA1-1-1X/V0/... in modular design (analog)	30223	
VT-VSPD-1-2X/V0/-0-1 in Euro-card format (digital)	30523	
VT-VSPA1-2-1X/V0/...in Euro-card format (analog)	30115	
VT-SSPA1-1-1X/V0/0-24 as plug-in amplifier	30116	

Additionally (800 mA version G24-8)	Data sheet	Material number
VT-2000-5X/X/V0/... in Euro-card format	29904	
VT-MSPA1-30 in modular design (analog)	30224	

Mating connectors (details see page 7)	Data sheet	Material number
For type DBEM: Mating connectors according to DIN EN 175301-803	08006	R901017011
For type DBEME: Mating connectors according to DIN EN 175201-804	08006	R900021267 (plastic) R900223890 (metal)