Bosch Rexroth Z2S6A1-6X/ pilot-operated check valve

Manufacturer: Bosch Rexroth

Manufacturer part number / published order designation: R900347498

Published model: Z2S6A1-6X/

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

No SO40/SO55/position-monitoring suffix is assigned. Their separate sections, switch wiring and accessories are omitted.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: Rexroth Check Valve Pilot Operated Re21548

Original pages	Compiled pages	Relevant content
2-4	2-4	Existing blocked-port, cracking-pressure, series, seal and variant coding. Published execution: Z2S6A1-6X/.; Actual A/B/both-port circuit symbol.; Standard pilot-operated check principle, pre-opening and pilot conditions.
6-8	5-7	Pressure, backpressure, flow, pilot ratio, fluid, viscosity, temperature and cleanliness limits.; Unmonitored standard opening and pressure-drop curves with test conditions.; Actual size 6 sandwich body, A/B/both-port dimensions, mounting pattern, seals and screws.

Ordering code

01	02	03	04		05		06	07	08	09	10
Z2S	**6**			**–**	**6X**	**/**					*****

01	Check valve, sandwich plate design	**Z2S**
02	Size 6	**6**

Leakage-free blocking

03	In channel A and B	**–**
	In channel A	**A**
	In channel B	**B**

Cracking pressure

04	1.5 bar	**1**
	3 bar	**2**
	6 bar	**3**
	10 bar	**4**
05	Component series 60 ... 69 (60 ... 69: unchanged installation and connection dimensions)	**6X**

Seal material (observe compatibility of seals with hydraulic fluid used, see page 6)

06	NBR seals	**no code**
	FKM seals	**V**

Corrosion resistance (outside)

07	None (valve housing primed)	**no code**
	Improved corrosion protection (240 h salt spray test according to EN ISO 9227)	**J3**

Locating hole

08	**Without** locating hole	**no code**
	With locating hole	**/60** [1]


Special versions

09	**Without** special version	**no code**
	Control open by external port G1/4 (only version "A" or "B")	**SO40**
	With pre-opening	**SO55**
	Control spool unloaded to port T	**SO60**
	With pre-opening and control open from channel P	**SO150**
	Symbols (examples) see page 3	
10	Further details in the plain text	


[1] Locking pin ISO 8752-3x8-St, material no. **R900005694** (separate order)

Symbols (① = component side, ② = plate side)


Type Z2S 6 A...

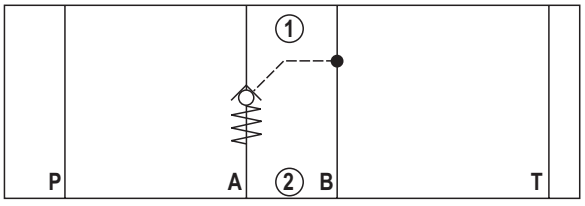


Type Z2S 6 – ... and Z2S 6 –...SO55

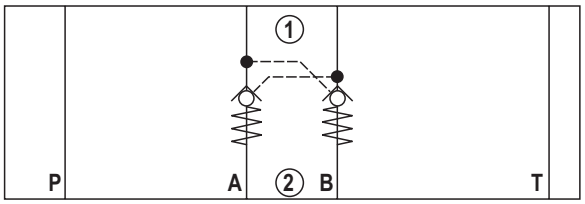


Type Z2S 6 B...

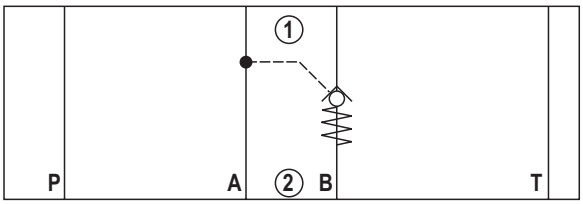


Type Z2S 6 A...SO40

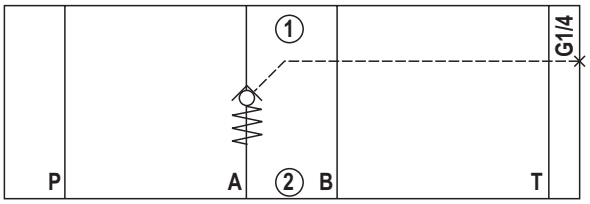

Type Z2S 6 A...SO60

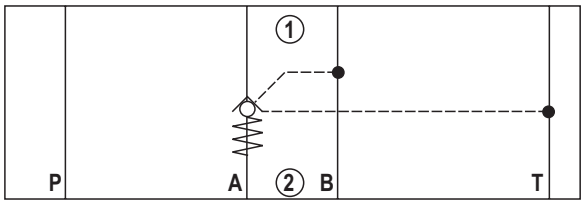

Type Z2S 6 –...SO150

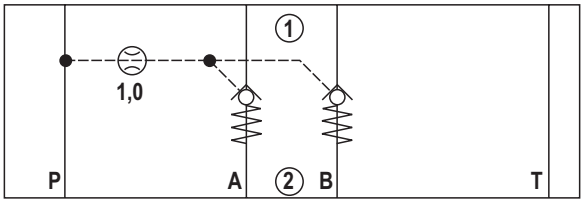


Function, sections, circuit example


The isolator valve type Z2S is a releasable check valve in sandwich plate design.
It is used for the leakage-free blocking of one or two actuator ports, even for long standstill times.
In direction A① to A② or B① to B②, there is a free flow; in the opposite direction, the flow is blocked.
If, for example, there is a flow through the valve in direction A① to A②, control spool (1) is moved in direction B side and pushes the poppet (2) off its seat. Hydraulic fluid can now flow from B② to B①.
In order to allow the poppets to be safely closed (2), the control spool (1) must be hydraulically unloaded (see circuit example).

Pre-opening


- The two-stage set-up with an increased control open ratio means even low pilot pressure can be unloaded securely.
- Avoidance of switching shocks due to dampened decompression of the pressure volume on the actuator side.

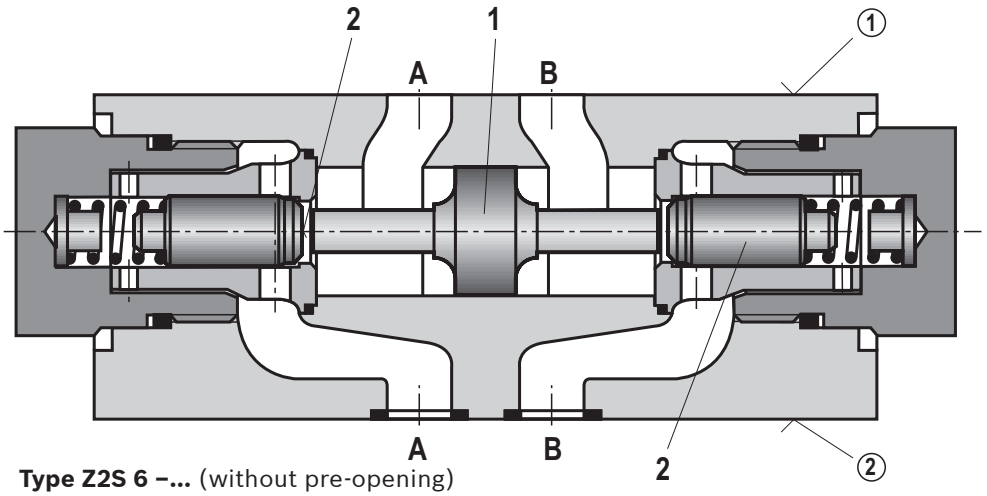

Type Z2S 6 –... (without pre-opening)

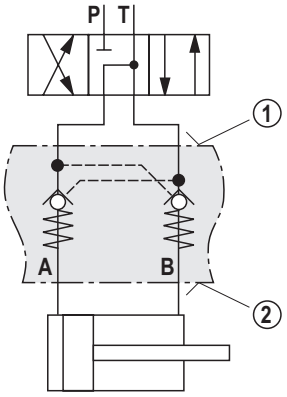

Circuit example, schematic

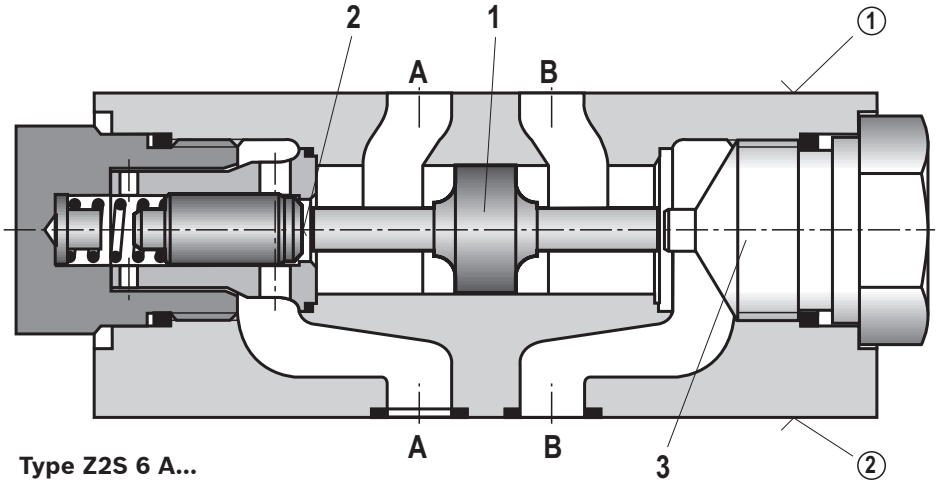

Type Z2S 6 A...

① = component side
② = plate side

1 Control spool, area A_2
2 Poppet, area A_1
3 Stop

☞ **Notice:**
In valves without pre-opening, sudden unloading of pent-up pressure volume may occur. Resulting switching shocks may lead to premature wear on installed components, as well as noise formation.

Technical data
(For applications outside these values, please consult us!)

General		
Weight	kg	approx. 0.8
Installation position		any
Ambient temperature range	°C	–30 ... +80 (NBR seals) –20 ... +80 (FKM seals)
Storage temperature range		see operating instructions 07600-B
$MTTF_D$ values according to EN ISO 13849	years	150 ... 1200 (for more information see data sheet 08012)

Hydraulic		
Maximum operating pressure	bar	350
Cracking pressure in free direction		see characteristic curves page 7
Maximum flow	l/min	80
Direction of flow		see symbols page 3
Hydraulic fluid		see table below
Hydraulic fluid temperature range (at the valve working ports)	°C	–30 ... +80 (NBR seals) –20 ... +80 (FKM seals)
Viscosity range	mm^2/s	2,8 ... 500
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)		Class 20/18/15 [1]
Area ratio ▶ Without pre-opening		A_1/A_2 ~ 1/3.5 (see sectional drawing page 4)
▶ With pre-opening		A_3/A_2 ~ 1/12.5 (see sectional drawing page 5)
▶ Version "SO60"		A_1/A_4 ~ 1/7 (see sectional drawing page 5)

Hydraulic fluid		**Classification**	**Suitable sealing materials**	**Standards**	**Data sheet**
Mineral oils		HL, HLP, HLPD, HVLP, HVLPD	NBR, FKM	DIN 51524	90220
Bio-degradable	▶ Insoluble in water	HETG	FKM	ISO 15380	90221
		HEES	FKM		
	▶ Soluble in water	HEPG	FKM	ISO 15380	
Flame-resistant	▶ Water-free	HFDU (glycol base)	FKM	ISO 12922	90222
		HFDU (ester base)	FKM		
		HFDR	FKM		
	▶ Containing water	HFC (Fuchs: Hydrotherm 46M, Renosafe 500; Petrofer: Ultra Safe 620; Houghton: Safe 620; Union: Carbide HP5046)	NBR	ISO 12922	90223

☞ **Important information on hydraulic fluids:**


- For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.
- **Bio-degradable and flame-resistant – containing water:**
  If components with galvanic zinc coating (e.g. version "J3" or "J5") or parts containing zinc are used, small amounts of dissolved zinc may get into the hydraulic system and cause accelerated aging of the hydraulic fluid. Zinc soap may form as a chemical reaction product, which may clog filters, nozzles and solenoid valves – particularly in connection with local heat input.
- **Flame-resistant – containing water**:
  Due to the increased cavitation tendency with HFC hydraulic fluids, the life cycle of the component may be reduced by up to 30% as compared to the use with mineral oil HLP. In order to reduce the cavitation effect, it is recommended - if possible specific to the installation - to back up the return flow pressure in ports T to approx. 20% of the pressure differential at the component.

[1] The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.
For the selection of filters, see www.boschrexroth.com/filter.

Characteristic curves


(measured with HLP46, ϑ_{oil} = 40 ±5 °C, averages)

***Δp-q*$_V$ characteristic curves**

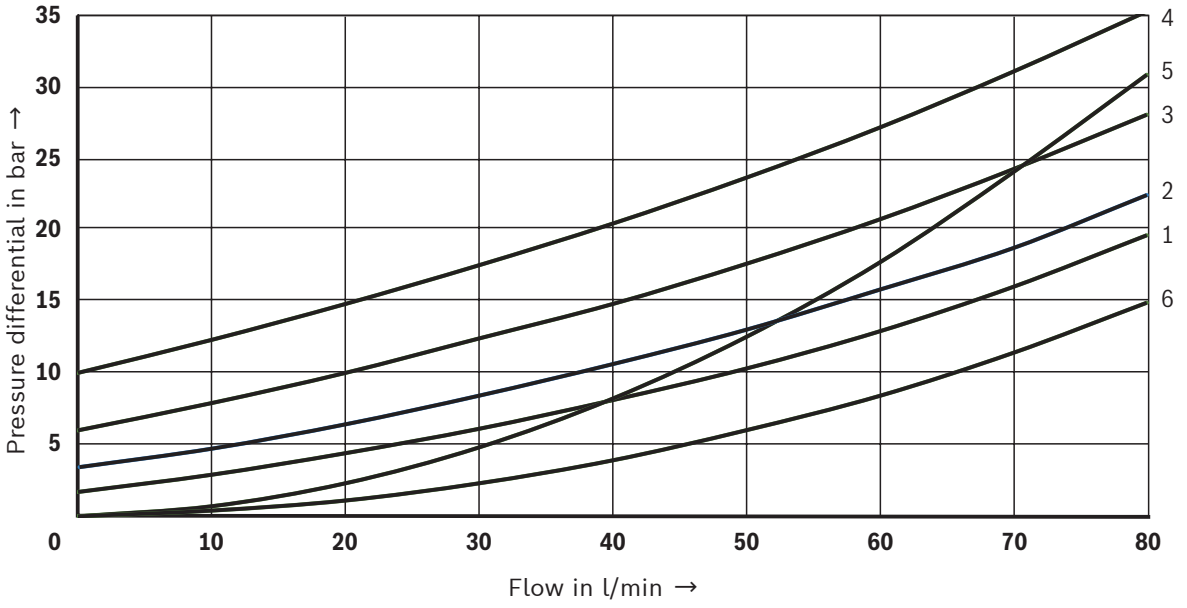



Cracking pressure:

- **1** 1.5 bar
- **2** 3 bar
- **3** 6 bar
- **4** 10 bar
- **5** Check valve controlled open via control spool
- **6** Free flow (without check valve use), version "A" and "B"

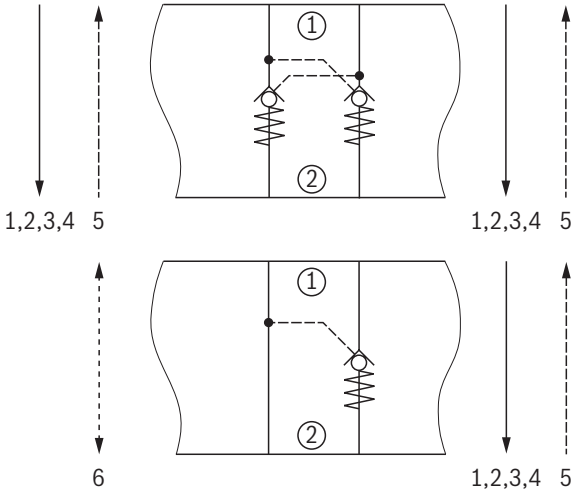

Dimensions
(dimensions in mm)

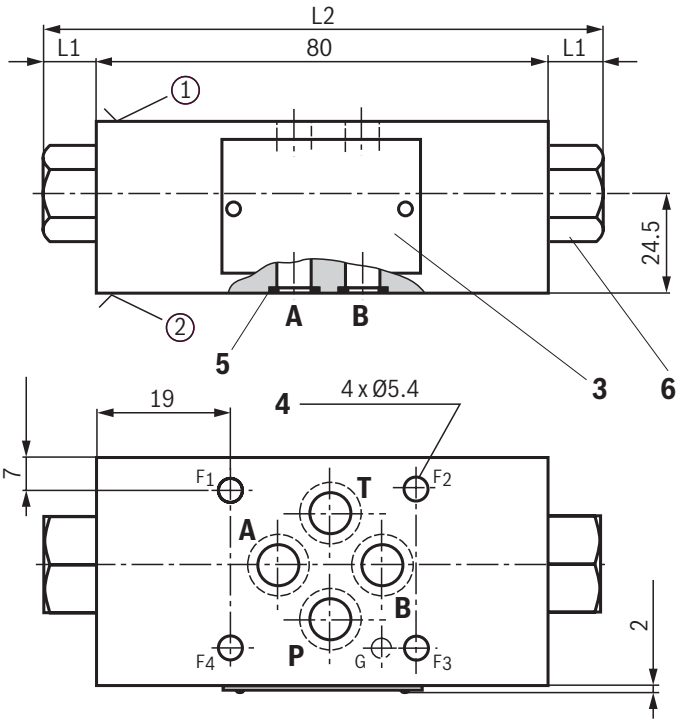



Required surface quality of the valve contact surface

Notice:
The dimensions are nominal dimensions which are subject to tolerances.

	"no code" "SO40" "SO60"	"SO55"						"SO150"
		„–“		"A"		"B"		
L1	11	21.5 [1]	21.5 [1]	21.5 [1]	11	11	21.5 [1]	21.5
L2	102	123		112.5		112.5		123

[1] Maximum dimension on the side of the check valve cartridge

① component side – porting pattern according to ISO 4401-03-02-0-05 and NFPA T3.5.1 R2-2002 D03 (**with** locating hole Ø4 x 4 mm deep or **without** locating hole)

② plate
side – porting pattern according to ISO 4401-03-02-0-05 and NFPA T3.5.1 R2-2002 D03 (**with** locating hole for locking pin ISO 8752-3x8-St, design "/60"or **without** locating hole)

3 Name plate

4 Through hole for valve mounting

5 Identical seal rings for ports A, B, P, T

6 Plug screw SW22

Valve mounting screws (separate order)
4 hexagon socket head cap screws ISO 4762 - M5 - 10.9
4 hexagon socket head cap screws N10-24 UNC ASTM - A574

Notice:
The length of the valve mounting screws of the sandwich plate valve must be selected according to the components mounted under and over the isolator valve.
Depending on the application, screw type and tightening torque must be adjusted to the circumstances.
Please ask Rexroth for screws with the required length.