

Tank accessories

BSP Aluminium sight





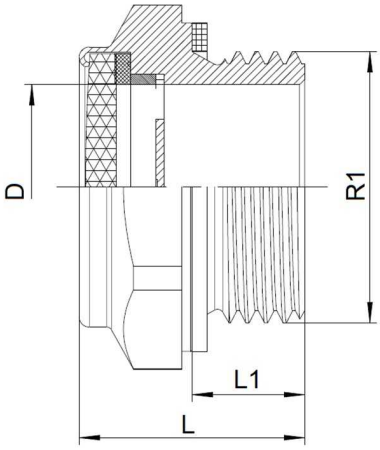

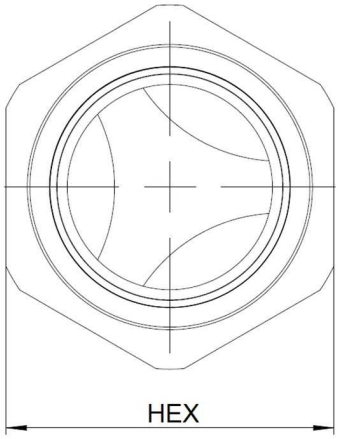

Material	Body-aluminum 6061-t6 mill finished Reflector aluminum mill finished red logo and dot in the middle Window polycabonateglass PC
Gasket type	Sealing ring rubber NBR
Threaded Gasket	Aramid fiver gasket Aluminum gasket
Maximum continuous working temperature	-40Cº to100Cº
Working pressure	The working pressure should be lower than 8bar The instantaneous pressure should be lower than 15bar

Part nº	R1	L	L1	HEX 1	ØD
NTL7G	1''1/2 BSP	25	15	55	40
NTL8G	2" BSP	27	16	70	49

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.