
Pressure and temperature transducers

Capillary electric thermometer 1/2 "BSP

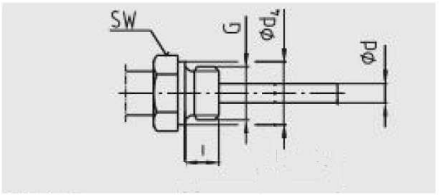

SW: 27

G: ½" BSP

l: 14 mm

ød: 8mm

ød4: 26mm



Capillary length	150mm
Battery	2 AA 1.5V batteries
Accuracy class :	Class 2 per EN 13190
Dial :	Aluminium white, black lettering
Window:	Instrument glass
Pointer :	Aluminium, black, micro adjustable pointer
Ingress protection	IP66, IP67

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.