Check-valve line mounting

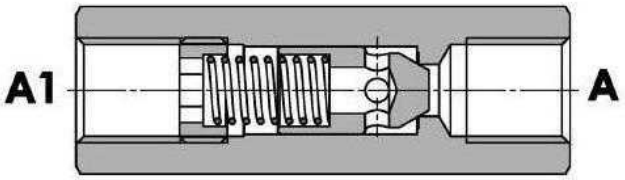



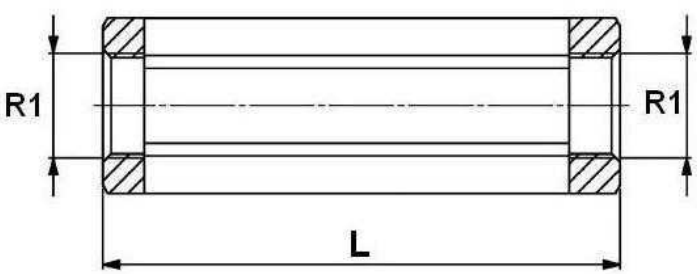



Material Body in steel

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Setting (bar)	L	B
VSR 1/4	1/4" BSP	12	350	0.5	62	19
VSR 1/4 2.5	1/4" BSP	12	350	2.5	62	19
VSR 1/4-5	1/4" BSP	12	350	5	62	19
VSR 1/4-10	1/4" BSP	12	350	10	62	19
VSR 3/8	3/8" BSP	30	350	0.5	68	24
VSR 3/8 2.5	3/8" BSP	30	350	2.5	68	24
VSR 3/8-5	3/8" BSP	30	350	5	68	24
VSR 3/8-10	3/8" BSP	30	350	10	68	24
FPR 1/2	1/2" BSP	45	320	0.5	78	27
VSR 1/2	1/2" BSP	45	320	0.5	78	27
VSR 1/2 2.5	1/2" BSP	45	320	2.5	78	27
VSR 1/2-5	1/2" BSP	45	320	5	78	27
VSR 1/2-10	1/2" BSP	45	320	10	78	27
VSR 3/4	3/4" BSP	85	300	0.5	88	36
VSR 3/4 2.5	3/4" BSP	85	300	2.5	88	36
VSR 3/4-5	3/4" BSP	85	300	5	88	36
VSR 3/4-10	3/4" BSP	85	300	10	88	36
VSR 1	1" BSP	140	250	0.5	112	46
VSR 1 2.5	1" BSP	140	250	2.5	112	46
VSR 1-5	1" BSP	140	250	5	112	46
VSR 1-10	1" BSP	140	250	10	112	46
VSR 1 1/4	1"1/4 BSP	200	250	0.5	145	55
VSR 1 1/4 2.5	1"1/4 BSP	200	250	2.5	145	55
VSR 1 1/4-5	1"1/4 BSP	200	250	5	145	55

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Check-valve line mounting

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Setting (bar)	L	B
VSR 1 1/4-10	1"1/4 BSP	200	250	10	145	55
VSR 1 1/2	1"1/2 BSP	310	210	0.5	155	60
VSR 1 1/2 2.5	1"1/2 BSP	310	210	2.5	155	60
VSR 1 1/2-5	1"1/2 BSP	310	210	5	155	60
FPR 1 1/2-10	1"1/2 BSP	310	210	10	155	60
VSR 1 1/2-10	1"1/2 BSP	310	210	10	155	60

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.