


Comp.flow contr.valve-with relief valve RF type



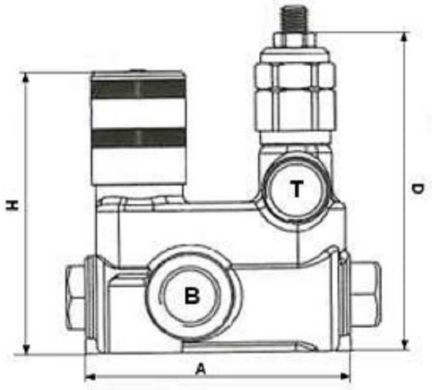

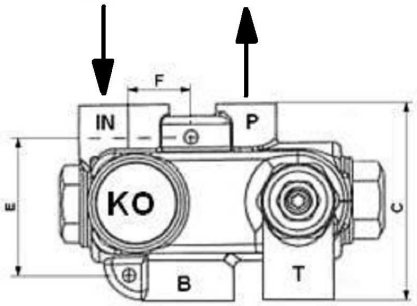



IN: Input socket
P: Regulated flow
B: Excess flow
T: Oil outlet hole P
Pressure setting range: 50-230 bar
Standard settings: 140 bar

Part nº	R1	R2	R3	Max. flow (l/min)	Max. Press. (bar)	A	C	D	E	F	H
RF40PV	1/2"BSP	3/8"BSP	1/2"BSP	40	250	87	65	67	46	22,5	98
RF70PV	3/4"BSP	1/2"BSP	3/4"BSP	70	250	106	80	128	52	24,5	101

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.