



Connectors with led

1/1

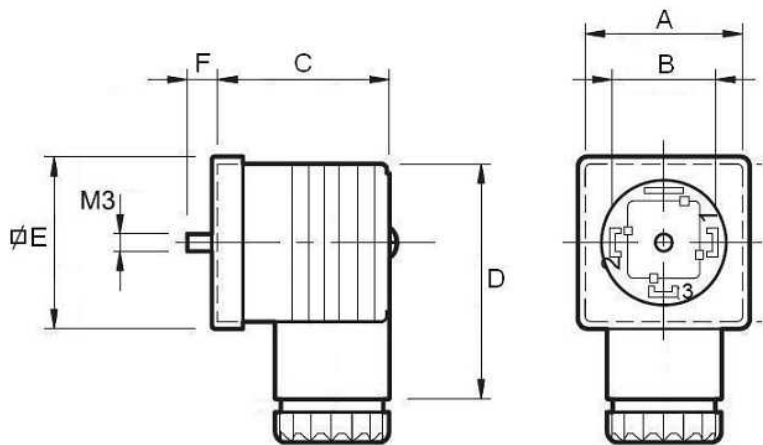

Insulation: Class C (IEC 60664-1:2007-04)
Work temperature: ·-40°C to 90°C
·CONLEDCC: -40°C to 125°C
Protection: IP 65 - IEC 60529
DIN 43650

Part nº	Voltage (V)	Type	Intensity	A	B	C	D	E	F
CONLED12CC	12 VDC	Standard	10 A	27,2	18	32	42,3	27,7	5,5
CONLED24CC	24 VDC	Standard	10 A	27,2	18	32	42,3	27,7	5,5
CONLEDCC	12 - 24 VDC (10-50V)	Standard	10 A	27,2	18	32	42,3	27,7	5,5
CONLED12CCEST	12 VDC	21.5x28.8 mm	10 A	-	-	-	-	-	-
CONLED24CCEST	24 VDC	21.5x28.8 mm	10 A	-	-	-	-	-	-
CONLED220CA	70-250 V	Standard	10 A	27,2	18	32	42,3	27,7	5,5