

Connectors with rectifier and led



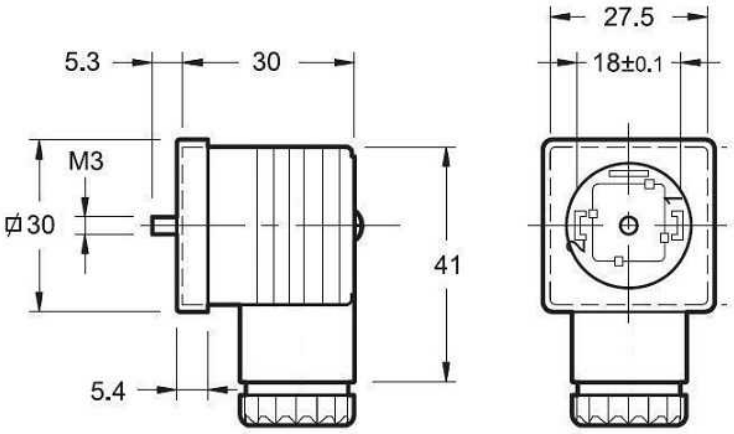



Isolation: Class C (IEC 60664-1:2007-04)
Work temperature: -40ºC to 90ºC
DIN 43650

Part nº	Voltage (V)	Type	P(IP)	Colour
CONLEDREC110	70-250	Led rojo+ Rectificador	IP 65 - IEC 60529	Transparente
CONLEDREC220	70-250	Led rojo+ Rectificador	IP 65 - IEC 60529	Transparente
CONLEDREC24	10-50	Led rojo+ Rectificador	IP 65 - IEC 60529	Transparente

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.