



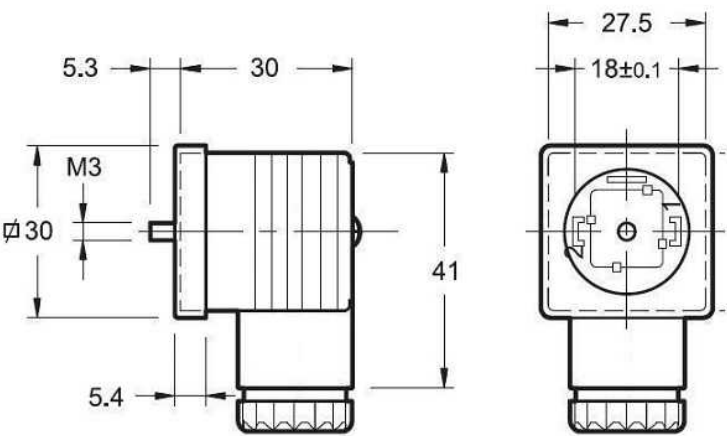

Isolation: Class C (IEC 60664-1:2007-04)
Work temperature: -40°C to 90°C
DIN 43650

Part nº	Voltage (V)	Type	P(IP)	Colour
CONLEDREC220	70-250	Led rojo+ Rectificador	IP 65 - IEC 60529	Transparente
CONLEDREC24	10-50	Led rojo+ Rectificador	IP 65 - IEC 60529	Transparente