

Joysticks


Control lever spring return



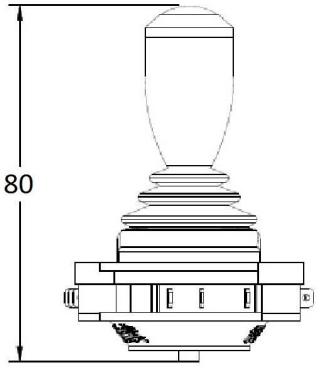

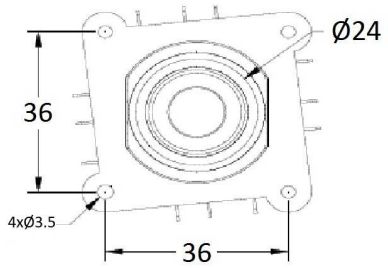

| **Environment Parameter** | |
|---|---|
| Storage Temperature | -30℃～+80℃ |
| Operating Temperature | -25℃～+80℃ |
| **Mechanical Parameter** | |
| Mechanical Angle | ±20° |
| Operating Torque | 1N (50N max) |
| Mechanical Life | 5 million |
| **Electrical Parameter** | |
| Power Supply Voltage | 125V 5A, 250V 3A, 250V 10A |
| Every switch has 3 wiring terminals, including normal open contact and normal close contact. | |

| Part nº | FUNCTIONS |
|---|---|
| **M8P-8M H** | 8 |

M8P-8M H
It has 4 closed contacts and 4 open contacts.
Cannot run 8 independent coils.
If it is possible to operate 2 contacts at the same time on each side (switched)

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*