


Control valves

Manual control valves

Control valve 1/2 BSP, 60L/min, handle operated and return to center by spring. Relief valve

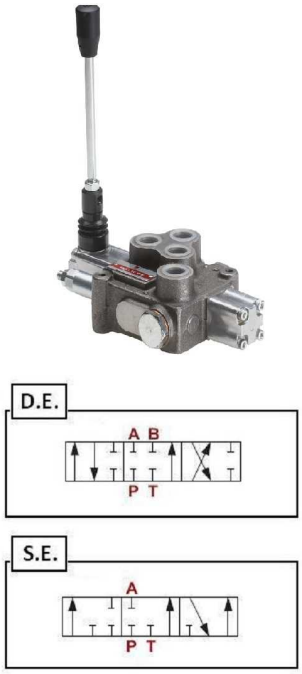

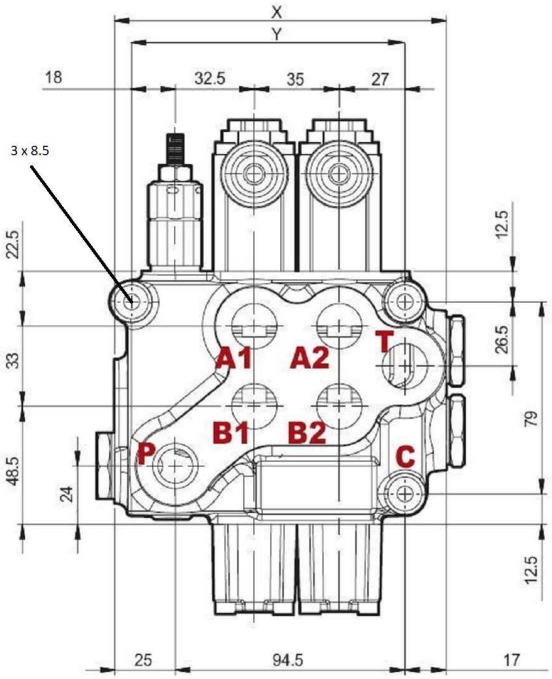

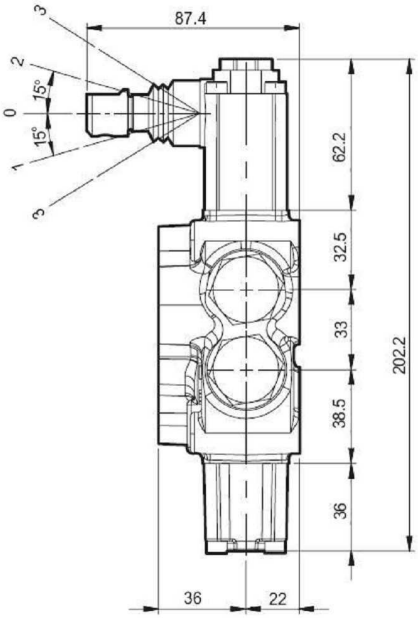

Max. Flow Rate	60 l/min
Operating Pressure (Maximum)	315 bar
Back Pressure (Maximum) on T port	25 bar
Ports	1/2" BSP
Relief Valve	120 bar (standar) / Regulation rate: 63-200 bar
Port C:	Carry-over placement port

Part nº	R1	Type	Max. flow (l/min)	Max. Press. (bar)	Levers	X	Y
YFM55/1 1/2 1P DE	1/2" BSP	D	60	315	1	101,5	78
YFM55/1 1/2 1P SE	1/2" BSP	S	60	315	1	101,5	78
YFM55/2 1/2 2P DD	1/2" BSP	D-D	60	315	2	136,5	113
YFM55/2 1/2 2P DS	1/2" BSP	D-S	60	315	2	136,5	113
YFM55/3 1/2 3P DDD	1/2" BSP	D-D-D	60	315	3	171,5	148
YFM55/3 1/2 3P DDS	1/2" BSP	D-D-S	60	315	3	171,5	148
YFM55/4 1/2 4P DDDD	1/2" BSP	D-D-D-D	60	315	4	206,5	183
YFM55/5 1/2 5P DDDDD	1/2" BSP	D-D-D-D-D	60	315	5	241,5	218
YFM55/6 1/2 6P DDDDDD	1/2" BSP	D-D-D-D-D-D	60	315	6	276,5	253

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.