

Control valves


Manual control valves

Control valve 3/8 BSP, 45L/MIN, handle operated and return to center by spring. Relief valve





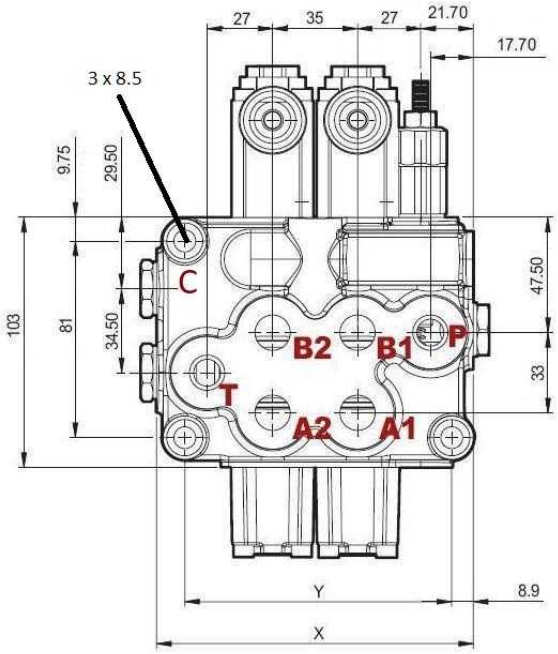

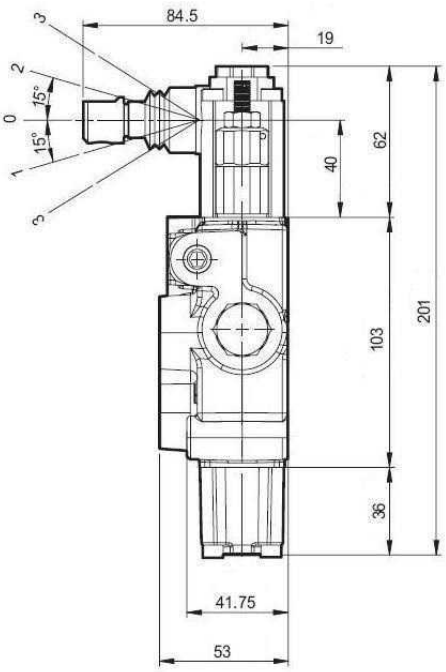

Max. Flow Rate	45 l/min
Operating Pressure (Maximum)	315 bar
Back Pressure (Maximum) on T port	25 bar
Ports	3/8" BSP
Relief Valve	120 bar (63-200 bar)
R1:	A,B,P,T
Seal kit x slider	15.54x2mm (2 units)

Part nº	R1	Type	Max. flow (l/min)	Max. Press. (bar)	Levers	X	Y
YFM35/1 3/8 1P DE	3/8" BSP	D	45	315	1	93,5	73
YFM35/1 3/8 1P SE	3/8" BSP	S	45	315	1	93,5	73
YFM35/2 3/8 2P DD	3/8" BSP	D-D	45	315	2	130,5	110
YFM35/2 3/8 2P DS	3/8" BSP	D-S	45	315	2	130,5	110
YFM35/3 3/8 3P DDD	3/8" BSP	D-D-D	45	315	3	165,5	147
YFM35/3 3/8 3P DDS	3/8" BSP	D-D-S	45	315	3	165,5	147
YFM35/4 3/8 4P DDDD	3/8" BSP	D-D-D-D	45	315	4	202,5	184
YFM35/5 3/8 5P DDDDD	3/8" BSP	D-D-D-D-D	45	315	5	239,5	221
YFM35/6 3/8 6P DDDDDD	3/8" BSP	D-D-D-D-D-D	45	315	6	276,5	258

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.