
Hydraulic cylinders

D.A. cylinder (bush and drilled rear end)

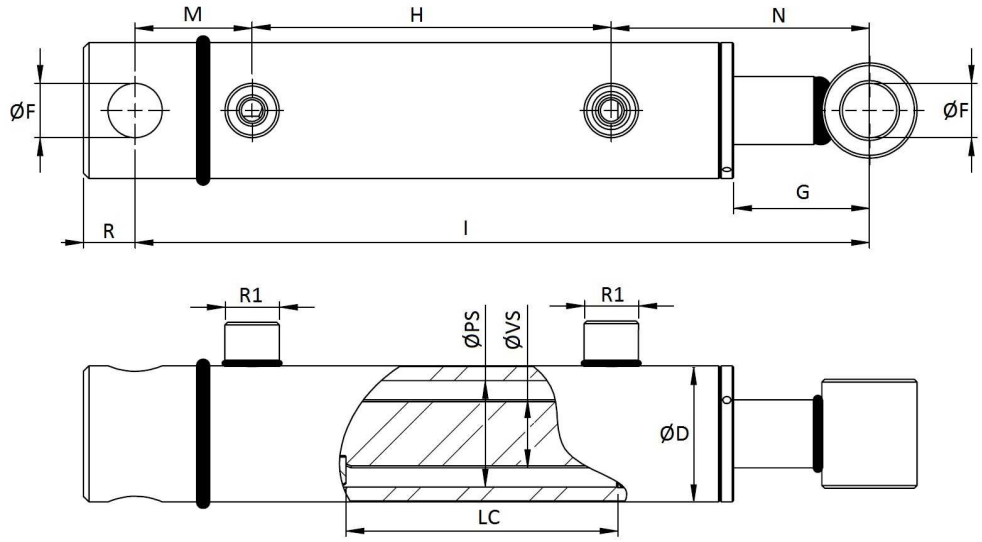

Part nº	R1	Working Pressure (bar)	Kg/ 100 bar	Piston rod	ØPS	Stroke (mm)	ØD	ØF	G	H	I	M	N	R
CTDECC2032100	1/4" BSP	180	800	20	32 H9	100	40	16	33	129,5	255	43	78	17
CTDECC2032150	1/4" BSP	180	800	20	32 H9	150	40	16	33	179,5	305	43	78	17
CTDECC2032200	1/4" BSP	180	800	20	32 H9	200	40	16	33	229,5	355	43	78	17
CTDECC2032250	1/4" BSP	180	800	20	32 H9	250	40	16	33	279,5	405	43	78	17
CTDECC2032300	1/4" BSP	180	800	20	32 H9	300	40	16	33	329,5	455	43	78	17
CTDECC2540100	3/8" BSP	180	1.250	25	40 H9	100	50	20	50	132	270	43	95	19
CTDECC2540200	3/8" BSP	180	1.250	25	40 H9	200	50	20	50	232	370	43	95	19
CTDECC2540250	3/8" BSP	180	1.250	25	40 H9	250	50	20	50	282	420	43	95	19
CTDECC2540300	3/8" BSP	180	1.250	25	40 H9	300	50	20	50	332	470	43	95	19
CTDECC2540400	3/8" BSP	180	1.250	25	40 H9	400	50	20	50	432	570	43	95	19
CTDECC3050100	3/8" BSP	180	1.960	30	50 H9	100	60	25	49	144	300	46	100	25
CTDECC3050200	3/8" BSP	180	1.960	30	50 H9	200	60	25	49	244	400	46	100	25

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.