Steam hose 18 bar, industrial cleaning, 210°C MI01021732

Documentation publisher / supplier: DICSA

Manufacturer part number / published order designation: MI01021732

Published model: MI01021732

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

The excerpt preserves the currently linked technical catalogue edition; differently coded newer product-card variants are not treated as equivalent.

Rows and illustrations for other sizes retained on the same original page are not assigned to this article.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: DICSA Hydraulic Hoses - Technical Catalogue

Original pages	Compiled pages	Relevant content
129	2	Exact MI01021732 row with the family construction, application, composition, size and stated pressure/temperature/geometry conditions. Distinguishes steam210°C from water95°C and separate safety factors.

Vapor 18 bar, limpieza indus. 210°C

Steam hose 18 bar, industrial cleaning, 210ºC
Tuyau vapeur 18 bar, nettoyage industriel 210ºC

INDUS TrAle®

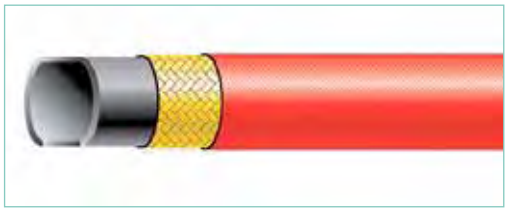

+210°C /+410°F Vapor/ Steam/ Vapeur
+95°C / +203°F Agua/ Water/ Eau

Vapor/ Steam/ Vapeur **10 : 1**
Agua/ Water/ Eau **3.15 : 1**

BS 5342:1985 2A

COMPOSICIÓN · COMPOSITION · COMPOSITION

// **EPDM liso conductivo** // EPDM, smooth, conductive // EPDM, lisse, conducteur

1 // **Malla acero trenzado**// Steel wire braided // Fil d´acier tressé

// **EPDM rojo** // Red EPDM // EPDM rouge

	mm	mm	bar	psi	bar	psi	mm	kg/m
MI01021713	13,5	24,5	18	261	180	2610	80	0,5
MI01021719	19	31	18	261	180	2610	110	0,65
MI01021725	25	38	18	261	180	2610	170	1
MI01021732	32	46	18	261	180	2610	150	1,3
MI01021738	38	53	18	261	180	2610	200	1,6
MI01021751	50,8	67	18	261	180	2610	300	2,15
MI01021776	76,2	93	18	261	180	2610	450	3,4