Twin welding hose - oxygene-acetylene MI0601060612

Documentation publisher / supplier: DICSA

Manufacturer part number / published order designation: MI0601060612

Published model: MI0601060612

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

The excerpt preserves the currently linked technical catalogue edition; differently coded newer product-card variants are not treated as equivalent.

Rows and illustrations for other sizes retained on the same original page are not assigned to this article.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: DICSA Hydraulic Hoses - Technical Catalogue

Original pages	Compiled pages	Relevant content
140	2	Exact MI0601060612 row with the family construction, application, composition, size and stated pressure/temperature/geometry conditions.

Bitubo soldadura oxígeno- acetileno

Twin welding hose- oxygene- acetylene
Tuyau pour soudure jumelé- oxygène- acétylène

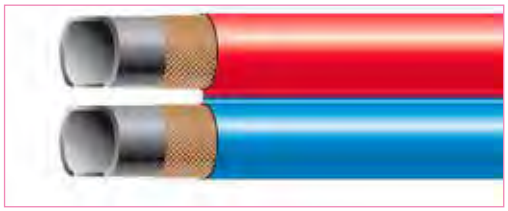

INDUS TrAle®

-30°C → +70°C

3 : 1

ISO 3821: 2008

COMPOSICIÓN · COMPOSITION · COMPOSITION

// **EPDM negro liso** // Black EPDM , smooth// EPDM Noir, lisse

1 // **Malla textil espiral** // Textile spiral braid // Tresse textile en spiral

// **EPDM liso, azul y rojo** // Black EPDM blue and red, smooth// EPDM lisse, bleu et rouge

	mm	mm	bar	psi	bar	psi	mm	kg/m
*	4,0-4,0	11	20	300	60	870	40	0,23
*	5,0-5,0	11	20	300	60	870	40	0,27
*	6,3-8,0	14	20	300	60	870	40	0,37
MI0601060612	6,3-6,3	12,3	20	300	60	870	40	0,31
*	6,3-9,0	15	20	300	60	870	45	0,45
MI0601080814	8-8	14	20	300	60	870	40	0,37
*	9-9	15	20	300	60	870	45	0,40
MI0601101016	10-10	16	20	300	60	870	50	0,43

// ***Bajo consulta** // On request // Sur demande