

Welding hose - oxygene MI06021003

Documentation publisher / supplier: DICSA

Manufacturer part number / published order designation: MI06021003

Published model: MI06021003

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

The excerpt preserves the currently linked technical catalogue edition; differently coded newer product-card variants are not treated as equivalent.

Rows and illustrations for other sizes retained on the same original page are not assigned to this article.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: DICSA Hydraulic Hoses - Technical Catalogue

Original pages	Compiled pages	Relevant content
138	2	Exact MI06021003 row with the family construction, application, composition, size and stated pressure/temperature/geometry conditions.


Soldadura oxígeno

Welding hose- oxygene

Tuyau pour soudure- oxygène

INDUS TrAile®

COMPOSICIÓN • COMPOSITION • COMPOSITION

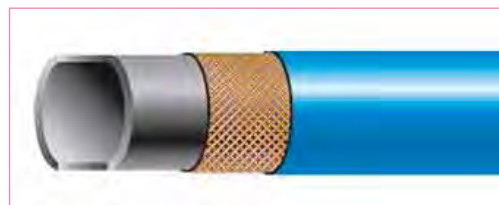

-30°C → +70°C



3 : 1



ISO 3821:2008



// EPDM negro liso // Black EPDM , smooth // EPDM Noir, lisse



1

// Malla textil espiral // Textile spiral braid // Tresse textile en spiral



// EPDM azul estriada ó < DN12 mm lisa // Blue EPDM fluted < DN12 mm smooth // EPDM bleu rainuré < DN12 mm lisse



	mm	mm	bar	psi	bar	psi	mm	kg/m
*	4	11	20	290	60	870	40	0,11
*	5	12	20	290	60	870	40	0,15
*	6,3	12,3	20	290	60	870	40	0,12
MI06020603	6,3	13.3	20	290	60	870	40	0,15
*	6,3	16,3	20	290	60	870	40	0,24
*	8	14	20	290	60	870	40	0,14
MI06020803	8	15	20	290	60	870	40	0,18
*	9	15	20	290	60	870	45	0,16
*	9	16	20	290	60	870	45	0,19
*	9	20	20	290	60	870	45	0,36
*	10	16	20	290	60	870	50	0,17
MI06021003	10	17	20	290	60	870	50	0,21
*	10,5	22,5	20	290	60	870	65	0,4
*	16	26	20	290	60	870	80	0,47
*	20	31	20	290	60	870	100	0,58
*	25	35	20	290	60	870	125	0,7

// *Bajo consulta // On request // Sur demande

