

Tanks, filters, sights, plugs and flanges

Motors

Direct current motor



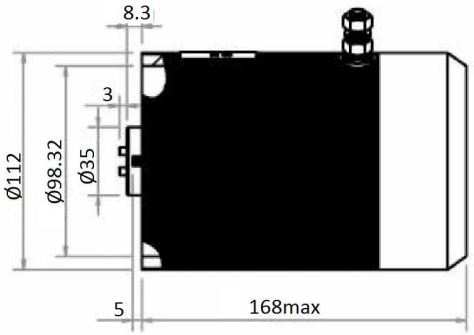



Built-in thermal relay

Part nº	Details	Voltage (V)	Power (W)	Rotation speed (rpm)
MCM12CC H-TD	Con relé / With relay	12 VDC	1600	2950
MCM12CC1800 H-TD	Con relé / With relay	12 VDC	1800	2950
MCM24DC H-TD	Con relé / With relay	24 VDC	2200	3100

***** Review attached PDF*****

-Rotation: clockwise

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.