



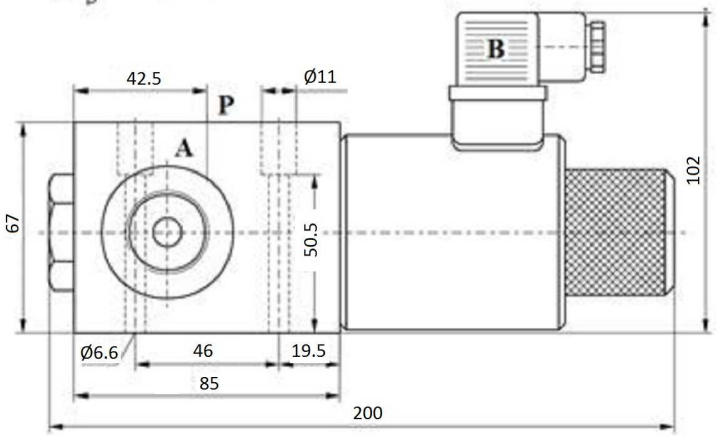

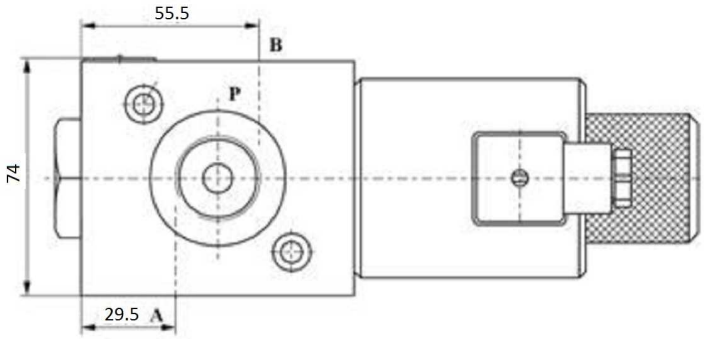

Coil: Protection IP65. Power: 45 W

Operating temp: [-20, +70] ºC

Part nº	R1	Nº ways	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)
KVC-3/2-10-41B-12DC1/2	1/2" BSP	3	12 VDC	60	250
KVC-3/2-10-41B-24DC1/2	1/2" BSP	3	24 VDC	60	250

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.