







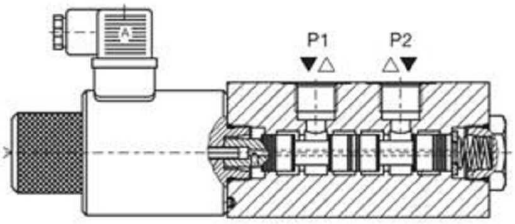

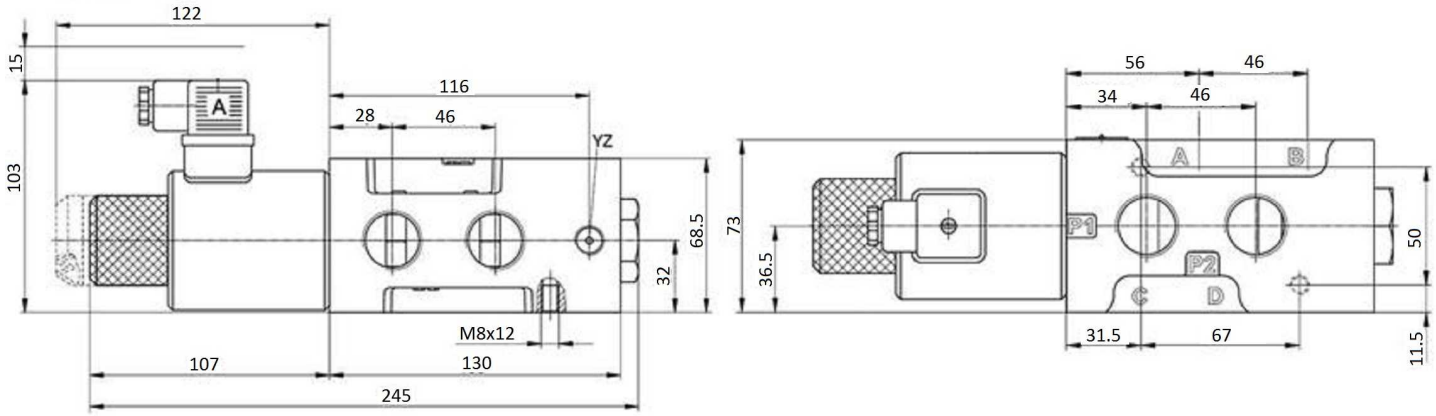

Operating temp: [-20, +70] ºC

Coil: Protection IP65. Power: 45 W

Part nº	R1	Nº ways	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	Press. without drainage	Press. with drainage
KV-6/2-10-DC-G1/2 MR	1/2" BSP	6	12 VDC	120	350	250	350
KV-6/2-10-24DC-G1/2MR	1/2" BSP	6	24 VDC	120	350	250	350
KV-6/2-10-AC-G1/2 MR	1/2" BSP	6	220 VAC	120	350	250	350

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.