



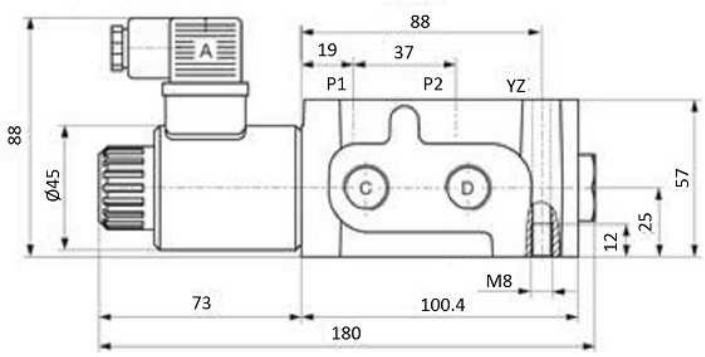

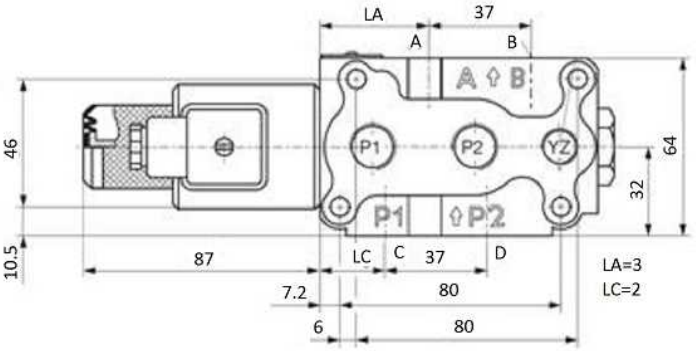

In total, 6 exits: 2 up, 2 right, 2 left
Operating temp: [-20, +70] ºC

Part nº	R1	Nº ways	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	Press. without drainage	Press. with drainage
KV-6/2-6-DC-G3/8 MR	3/8" BSP	6	12 VDC	50	250	250	350
KV-6/2-6-24DC-G3/8 MR	3/8" BSP	6	24 VDC	50	250	250	350
KV-6/2-6-48DC-G3/8MR	3/8" BSP	6	48 VDC	50	250	250	350
KV-6/2-6-AC-G3/8 MR	3/8" BSP	6	220 VAC	50	250	250	350

Working pressure = 350 BAR when there is drainage

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.