



Diverter valve 8 ways 3/8"








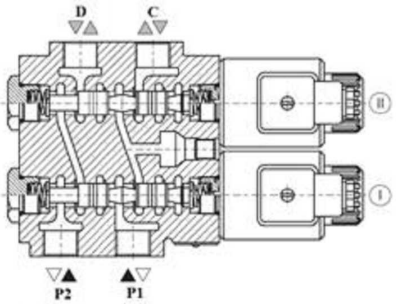

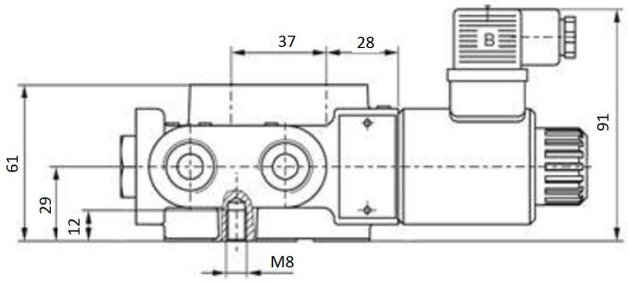

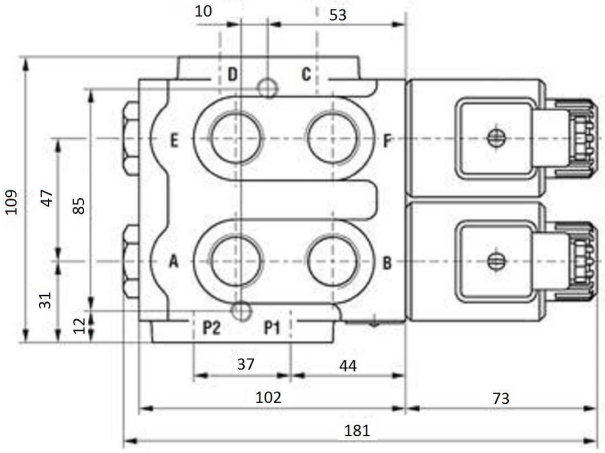

Operating temp: [-20, +70] ºC

Coil: Protection IP65. Power: 29 W

Part nº	R1	Nº ways	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)
KV-8/3-6-DC-G3/8MR	3/8" BSP	8	12 VDC	50	250
KV-8/3-6-24DC-G3/8MR	3/8" BSP	8	24 VDC	50	250
KV-8/3-6-48DC-G3/8MR	3/8" BSP	8	48 VDC	50	250
KV-8/3-6-110AC-G3/8MR	3/8" BSP	8	110 VAC	50	250
KV-8/3-6-AC-G3/8 MR	3/8" BSP	8	220 VAC	50	250

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.