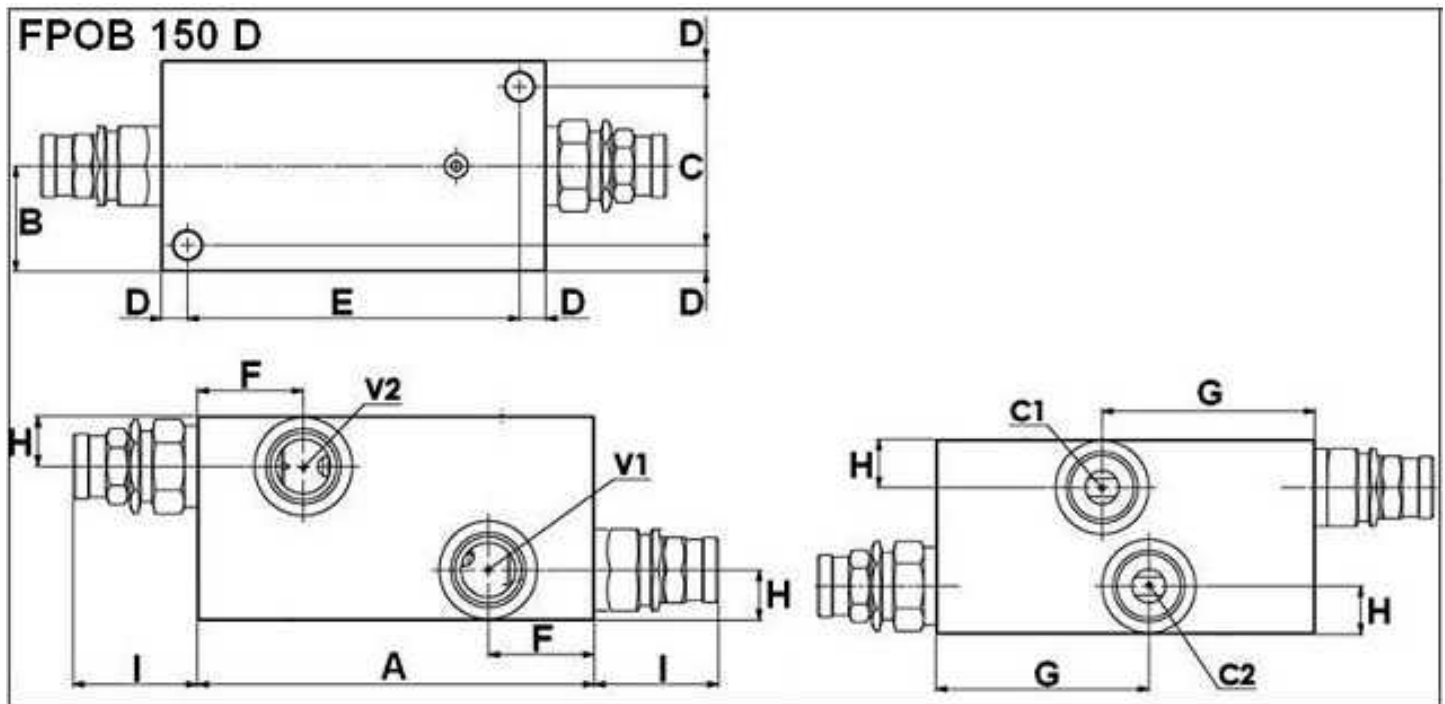
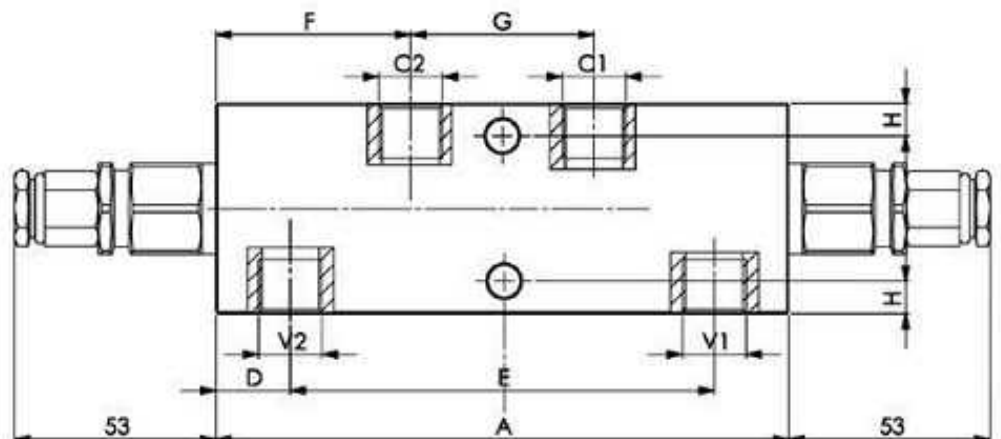


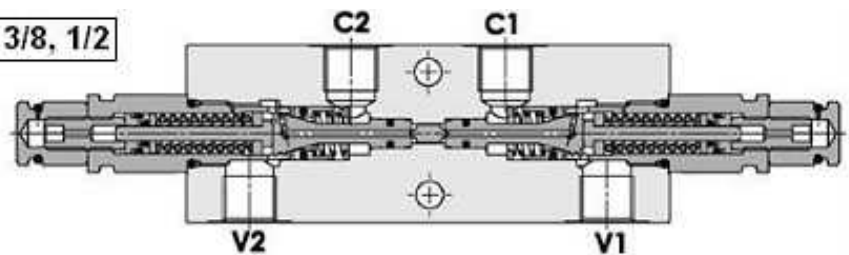


Double acting balanced overcenter (line)**FPOB D 3/8, 1/2****R1=C1, C2, V1, V2**

Pilot ratio: 1:4,25 (1 : 8 and 1 : 11 on request)
 FPOB 150D 3/4 L35: 1:4 (1:8 on request)

Material: Body is steel made zinc plated.

Max.flow: 150 l/min

Max.press: 350 bar

Adjustment means: Leakproof screw

Assembly: with control valve with any spool

Double acting balanced overcenter (line)

Part n°	R1	Max. flow (l/min)	Max. Press. (bar)	Setting (bar)	Reg. rate (bar)	Press. increase (bar/turn)	A	B	C	D	E	F	G	H	I
FPOB D 3/8 L 20	3/8" BSP	50	350	170	60 - 210	70	150	55	30	19	112	51	48	8,5	8,5
FPOB D 3/8 L 35	3/8" BSP	50	350	280	80 - 350	120	150	55	30	19	112	51	48	8,5	8,5
FPOB D 1/2 L20	1/2" BSP	50	350	170	60 - 210	70	150	65	35	19	112	51	48	11	8,5
FPOB D 1/2 L35	1/2" BSP	50	350	280	80 - 350	120	150	65	35	19	112	51	48	11	8,5
FPOB 150 D 3/4 L35	3/4" BSP	150	350	280	100-350	110	146	40	60	10	126	39	82	18,50	46