
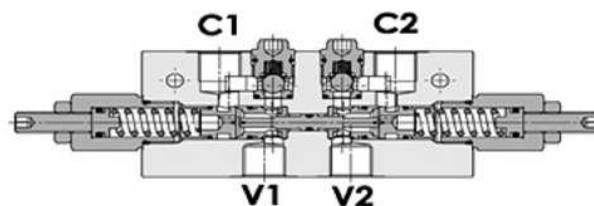
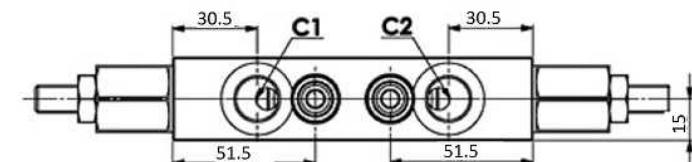
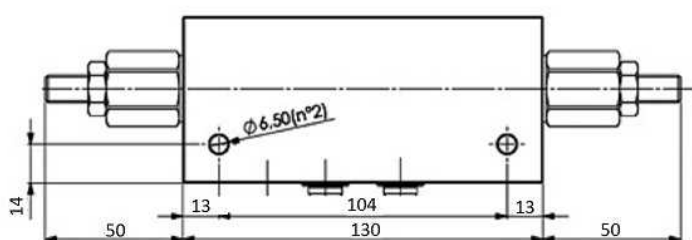
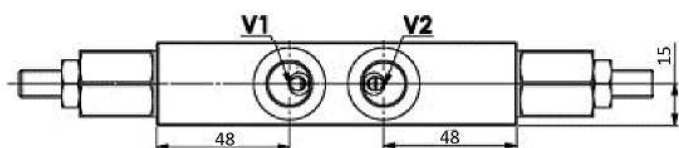

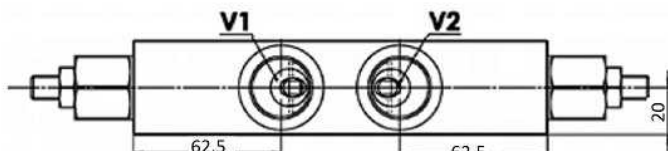
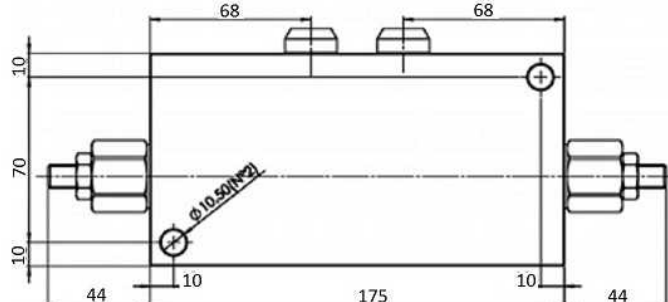
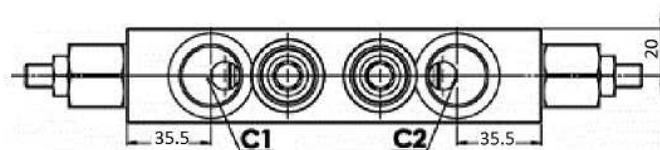



Double acting overcenter**C1-C2-V1-V2: 3/8" BSP****FPOE40D3/8LA****C1-C2-V1-V2: 3/4" BSP****FPOE120D3/4LA****Material:** Body is in aluminium alloy**Pilot ratio:** FPOE40D3/8LA=1 : 2.9 (1 : 6.6 on request)
FPOE120D3/4LA=1 : 3.2 (1 : 8.2 on request)**Adjustment means:** Leakproof screw adjustment**R1=C1, C2, V1, V2**

Part n°	R1	Max. flow (l/min)	Max. Press. (bar)	Setting (bar)	Reg. rate (bar)	Press. increase (bar/turn)	Pilot ratio
FPOE40D3/8LA20	3/8" BSP	40	350	200	60-210	51	1:2,9
FPOE40D3/8LA35	3/8" BSP	40	350	250	120-350	88	1:2,9
FPOE120D3/4LA20	3/4" BSP	120	350	200	60-210	56	1:3,2
FPOE120D3/4LA35	3/4" BSP	120	350	250	120-350	90	1:3,2

*Lines A and B are connected to Tank