

Hydraulic valves


Check valves

Double pilot operated check valve in block (in T), with fittings





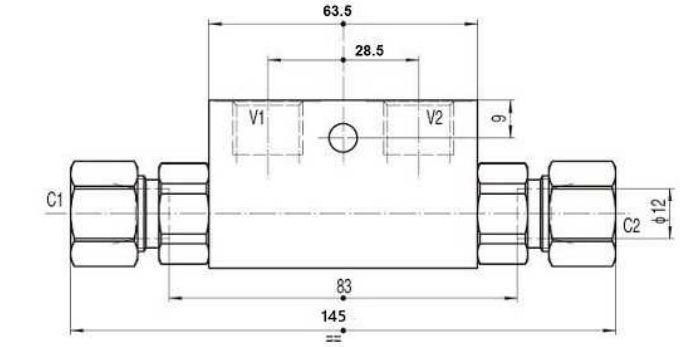

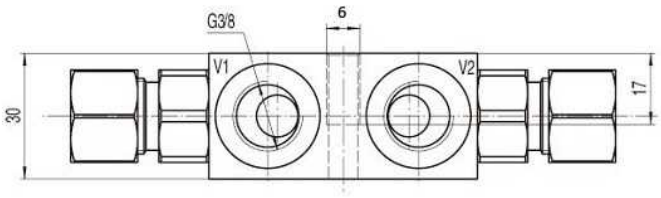

Size of oil port	
V1、V2	G3/8
C1、C2	Φ12mm

Part nº	R1	FLOW MAX (l/min)	MAX. PRESSURE (bar)	Pilot ratio
ADPT3/8	3/8" BSP	30	315	1:4

***** Review attached PDF*****

KADPT3 / 8 same as ADPT3 / 8 but without nut and ring.

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.