

Hydraulic valves


Check valves


Double pilot operated check valve







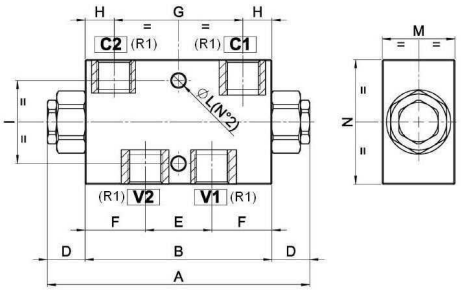

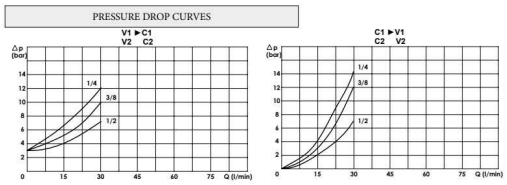

Material Body in Aluminium

Cracking Pressure 2,5 bar (5 bar and 10 bar on request)

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio	ØN	A	B	D	E	F	G	H	I	M	N
VT003006	3/8" BSP	30	250	1 : 7	6,5	127	90	18,5	32	29	62	14	40	35	60
VT003008	1/2" BSP	45	250	1 : 3.5	8,5	138	110	14,5	34	38	68	21	40	35	70

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.