


Double relief valve in A and B - crossed discharge





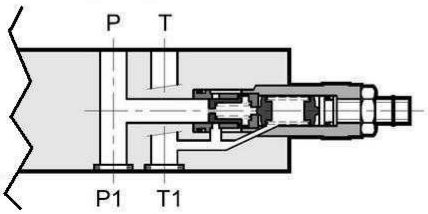

ISO 4401-05-04-0-05
CETOP 4.2-4-05-320

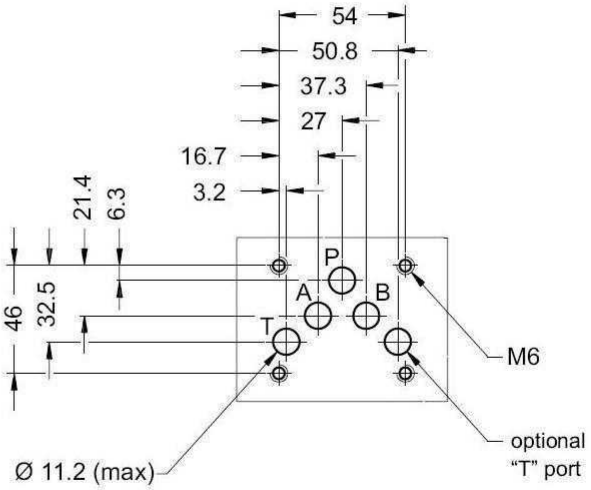

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)	Reg. rate (bar)
RQ4M3-D/51	NG-10	120	350	0 - 70

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.