

# Double relief valve in A and B - discharge in T









ISO 4401-05-04-0-05
CETOP 4.2-4-05-320

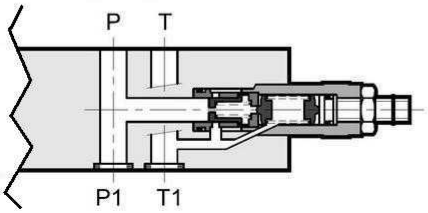

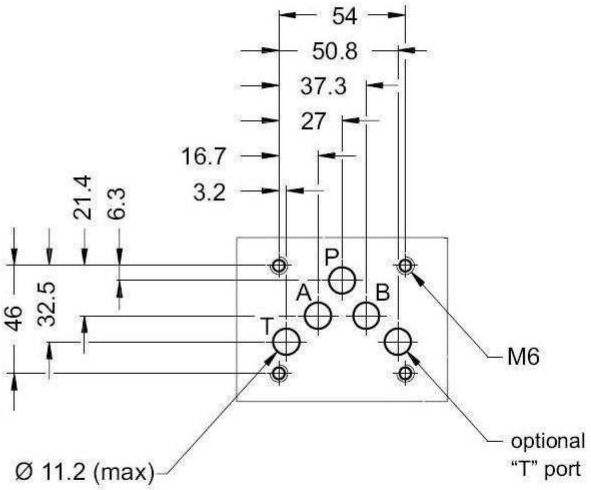
| Part nº | Size | Max. flow (l/min) | Max. Press. (bar) | Reg. rate (bar) |
|---|---|---|---|---|
| **RQ4M3-DT/51** | NG-10 | 120 | 350 | 0 - 70 |

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*