
Double rod pneumatic cylinders

double rod, D.A. pneumatic cylinders

double rod, D.A. pneumatic cylinders Ø16



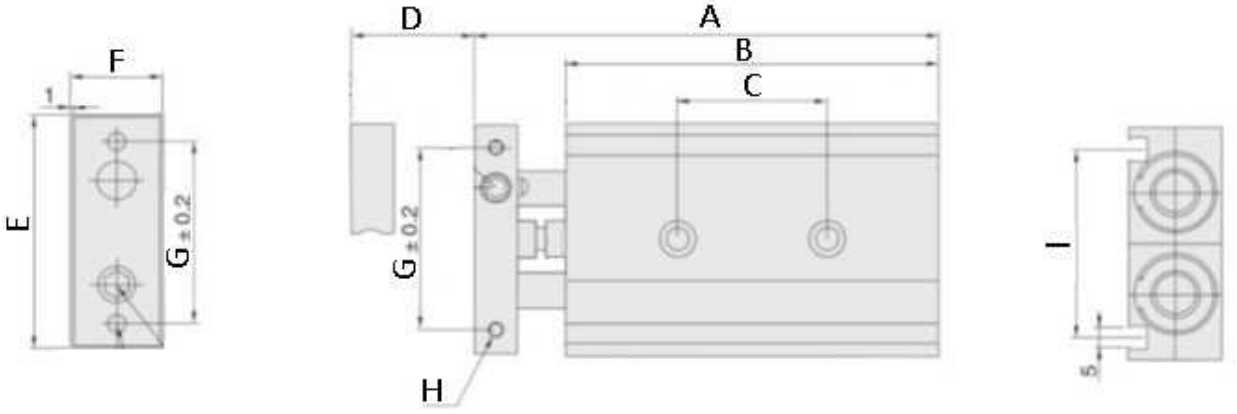

Bore (mm)/Camisa (mm)	10	16	20	25	32
Working pressure/Presión de trabajo (bar)	1 - 7			0.5 - 7	
Guaranteed pressure/Presión garantizada (bar)	10.5				
Temperatura de trabajo/Woking temperature (ºC)	5-60°C				

Part nº	Stroke (mm)	A	B	C	D	E	F	G	H	I
CNDEM1610	10	79	60	25	10	58	20	45	2-M4x0,7	47.5
CNDEM1620	20	79	60	25	20	58	20	45	2-M4x0,7	47.5
CNDEM1625	25	79	60	25	25	58	20	45	2-M4x0,7	47.5
CNDEM1630	30	79	60	35	30	58	20	45	2-M4x0,7	47.5
CNDEM1640	40	79	60	35	40	58	20	45	2-M4x0,7	47.5
CNDEM1650	50	79	60	35	50	58	20	45	2-M4x0,7	47.5
CNDEM1660	60	79	60	45	60	58	20	45	2-M4x0,7	47.5
CNDEM1670	70	79	60	45	70	58	20	45	2-M4x0,7	47.5
CNDEM1675	75	79	60	45	75	58	20	45	2-M4x0,7	47.5
CNDEM1680	80	79	60	45	80	58	20	45	2-M4x0,7	47.5
CNDEM1690	90	79	60	55	90	58	20	45	2-M4x0,7	47.5
CNDEM16100	100	79	60	55	100	58	20	45	2-M4x0,7	47.5
CNDEM16125	125	79	60	65	125	58	20	45	2-M4x0,7	47.5

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

double rod, D.A. pneumatic cylinders Ø16

Part nº	Stroke (mm)	A	B	C	D	E	F	G	H	I
CNDEM16150	150	79	60	75	150	58	20	45	2-M4x0,7	47.5

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.