
Double rod pneumatic cylinders

double rod, D.A. pneumatic cylinders

double rod, D.A. pneumatic cylinders Ø20



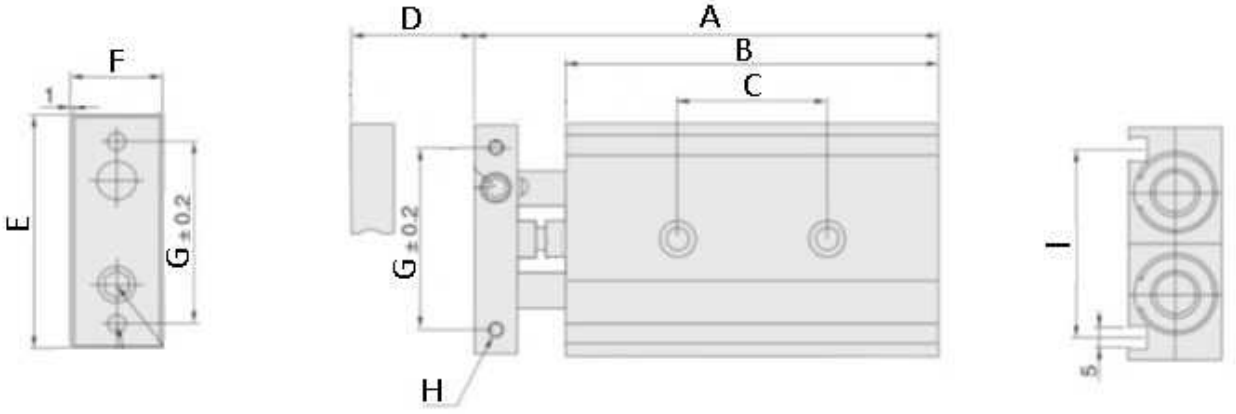

Bore (mm)/Camisa (mm)	10	16	20	25	32
Working pressure/Presión de trabajo (bar)	1 - 7			0.5 - 7	
Guaranteed pressure/Presión garantizada (bar)	10.5				
Temperatura de trabajo/Woking temperature (ºC)	5-60°C				

Part nº	Stroke (mm)	A	B	C	D	E	F	G	H	I
CNDEM2010	10	94	70	30	10	64	25	50	2-M4x0,7	53
CNDEM2020	20	94	70	30	20	64	25	50	2-M4x0,7	53
CNDEM2025	25	94	70	30	25	64	25	50	2-M4x0,7	53
CNDEM2030	30	94	70	40	30	64	25	50	2-M4x0,7	53
CNDEM2040	40	94	70	40	40	64	25	50	2-M4x0,7	53
CNDEM2050	50	94	70	40	50	64	25	50	2-M4x0,7	53
CNDEM2060	60	94	70	40	60	64	25	50	2-M4x0,7	53
CNDEM2070	70	94	70	40	70	64	25	50	2-M4x0,7	53
CNDEM2075	75	94	70	60	75	64	25	50	2-M4x0,7	53
CNDEM2080	80	94	70	60	80	64	25	50	2-M4x0,7	53
CNDEM2090	90	94	70	60	90	64	25	50	2-M4x0,7	53
CNDEM20100	100	94	70	60	100	64	25	50	2-M4x0,7	53
CNDEM20125	125	94	70	80	125	64	25	50	2-M4x0,7	53

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

double rod, D.A. pneumatic cylinders Ø20

Part nº	Stroke (mm)	A	B	C	D	E	F	G	H	I
CNDEM20150	150	94	70	80	150	64	25	50	2-M4x0,7	53

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.