
Double rod pneumatic cylinders

double rod, D.A. pneumatic cylinders

# double rod, D.A. pneumatic cylinders Ø25





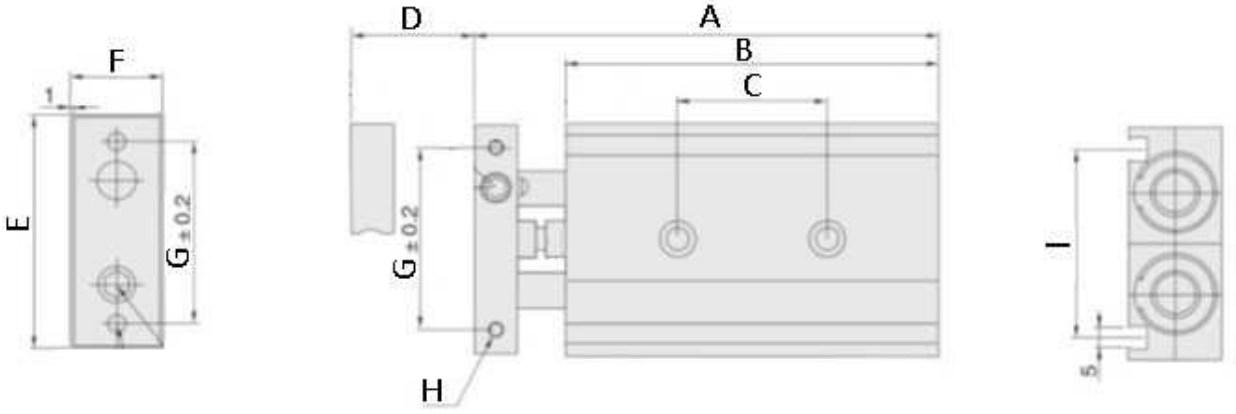


| Bore (mm)/Camisa (mm) | 10 | 16 | 20 | 25 | 32 |
|---|---|---|---|---|---|
| Working pressure/Presión de trabajo (bar) | 1 - 7 | | | 0.5 - 7 | |
| Guaranteed pressure/Presión garantizada (bar) | 10.5 | | | | |
| Temperatura de trabajo/Woking temperature (ºC) | 5-60°C | | | | |

| Part nº | Stroke (mm) | A | B | C | D | E | F | G | H | I |
|---|---|---|---|---|---|---|---|---|---|---|
| **CNDEM2510** | 10 | 96 | 72 | 30 | 10 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2520** | 20 | 96 | 72 | 30 | 20 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2525** | 25 | 96 | 72 | 30 | 25 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2530** | 30 | 96 | 72 | 40 | 30 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2540** | 40 | 96 | 72 | 40 | 40 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2550** | 50 | 96 | 72 | 40 | 50 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2560** | 60 | 96 | 72 | 60 | 60 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2570** | 70 | 96 | 72 | 60 | 70 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2575** | 75 | 96 | 72 | 60 | 75 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2580** | 80 | 96 | 72 | 60 | 80 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM2590** | 90 | 96 | 72 | 60 | 90 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM25100** | 100 | 96 | 72 | 60 | 100 | 80 | 30 | 78 | 2-M5x0,8 | 64 |
| **CNDEM25125** | 125 | 96 | 72 | 80 | 125 | 80 | 30 | 78 | 2-M5x0,8 | 64 |

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*

# double rod, D.A. pneumatic cylinders Ø25



| Part nº | Stroke (mm) | A | B | C | D | E | F | G | H | I |
|---|---|---|---|---|---|---|---|---|---|---|
| **CNDEM25150** | 150 | 96 | 72 | 80 | 150 | 80 | 30 | 78 | 2-M5x0,8 | 64 |

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*