
Double rod pneumatic cylinders

double rod, D.A. pneumatic cylinders

double rod, D.A. pneumatic cylinders Ø32

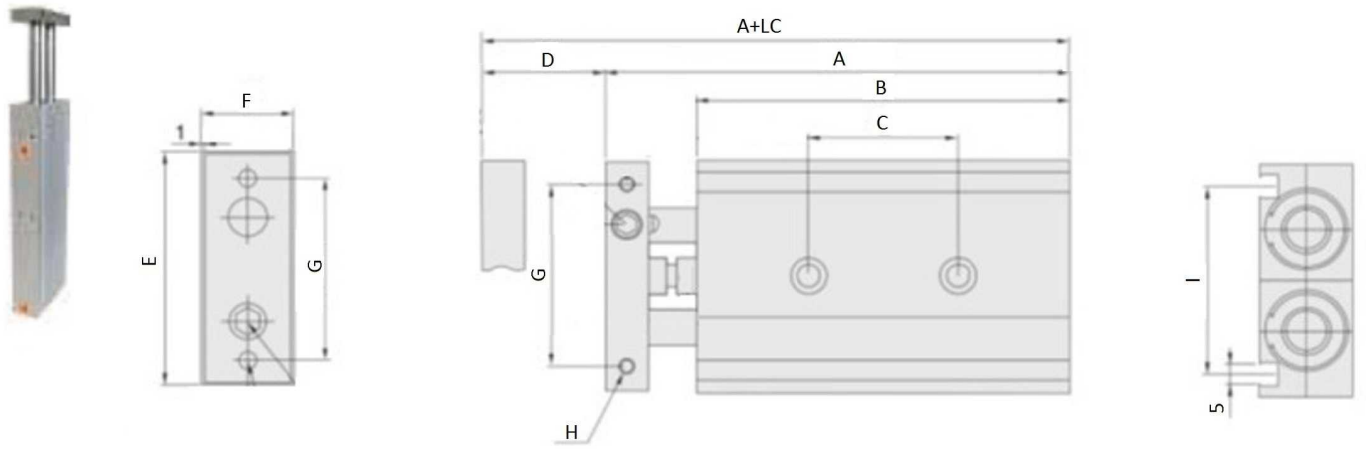

Bore (mm)/Camisa (mm)	10	16	20	25	32
Working pressure/Presión de trabajo (bar)	1 – 7		0.5 – 7		
Guaranteed pressure/Presión garantizada (bar)	10.5				
Temperatura de trabajo/Woking temperature (ºC)	5–60°C				

Part nº	Stroke (mm)	A	B	C	D	E	F	G	H	I
CNDEM3210	10	112	82	40	10	98	38	75	2-M5x0,8	76
CNDEM3220	20	112	82	40	20	98	38	75	2-M5x0,8	76
CNDEM3225	25	112	82	40	25	98	38	75	2-M5x0,8	76
CNDEM3230	30	112	82	50	30	98	38	75	2-M5x0,8	76
CNDEM3240	40	112	82	50	40	98	38	75	2-M5x0,8	76
CNDEM3250	50	112	82	50	50	98	38	75	2-M5x0,8	76
CNDEM3260	60	112	82	70	60	98	38	75	2-M5x0,8	76
CNDEM3270	70	112	82	70	70	98	38	75	2-M5x0,8	76
CNDEM3275	75	112	82	70	75	98	38	75	2-M5x0,8	76
CNDEM3280	80	112	82	70	80	98	38	75	2-M5x0,8	76
CNDEM3290	90	112	82	70	90	98	38	75	2-M5x0,8	76
CNDEM32100	100	112	82	70	100	98	38	75	2-M5x0,8	76
CNDEM32125	125	112	82	90	125	98	38	75	2-M5x0,8	76
CNDEM32150	150	112	82	90	150	98	38	75	2-M5x0,8	76

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.