
DS3 solenoid (alternative current)



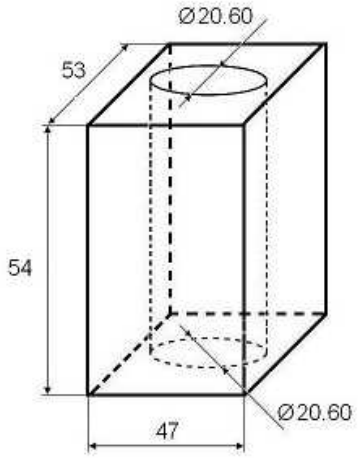

Part nº	Voltage (V)	Power (W)	Direct. valve	Intensity	f (Hz)
C20.6-A110-50K1/10	110 VAC	44	DS3	1,84 A*	50/60
C20.6-A230-50K1/10	230 VAC	48	DS3	0,76 A*	50/60
C20.6-A24-50K1/10	24 VAC	32	DS3	8 A*	50
C20.6-A48-50K1/10	48 VAC	41	DS3	4,4 A*	50

* Current consumption at inrush

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.