
DS3 solenoid (direct current)



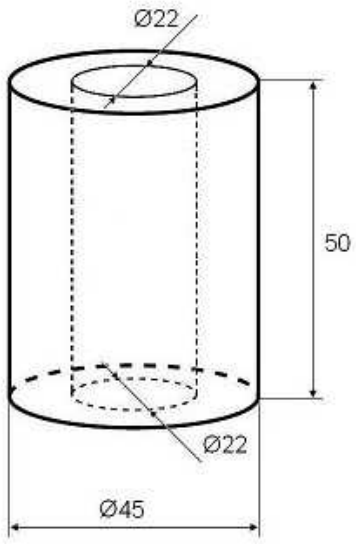

Part nº	Voltage (V)	Power (W)	Direct. valve	Intensity	Resist. at 20ºC
C22-D12K1/10	12 VDC	32,7	DS3	2,72 A	4,4
C22-D24K1/10	24 VDC	31	DS3	1,29 A	18,6
C22-D48K1/10	48 VDC	29,5	DS3	0,61 A	78,6

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.