
Hydraulic valves


Pressure relief valves


Dual cross direct acting steel relief valve screw adjust




3/8

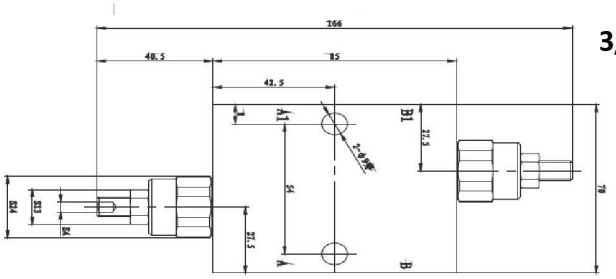




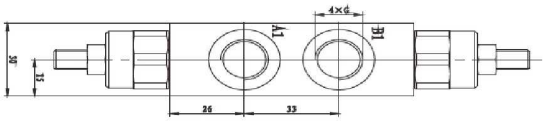

1/2

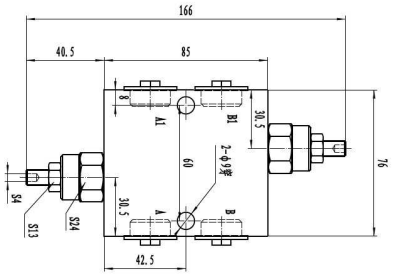



Part nº	R1	FLOW MAX (l/min)	MAX. PRESSURE (bar)	Setting (bar)	Reg. rate (bar)
LDL3/810	3/8" BSP	45	250	100	10-100
LDL3/820	3/8" BSP	45	250	5	20-250
LDL1/210	1/2" BSP	60	250	70	10-100
LDL1/220	1/2" BSP	60	250	70	20-250
LDL1/235	1/2" BSP	60	250	100	100-315

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.