

Control valves

Electrical control valve

Electric control valve 3/8





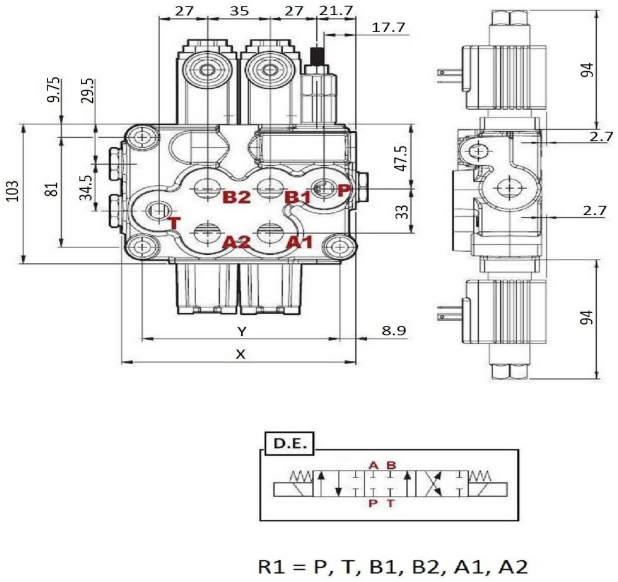

R1 = P, T, B1, B2, A1, A2

Coil features · Nominal voltage tolerance: ±10%
· Electric power: 36W

Nominal flow rate 45 l/min

Back Pressure (max) 25 bar

Pressure relief valve reg.rate: 63-200 bar

Part nº	R1	Voltage (V)	Type	Max. flow (l/min)	Max. Press. (bar)	Nº of elements	X	Y
YE45/1 3/8 1P DE	3/8" BSP	12 VDC	D.E.	45	250	1	93,5	73
YE45/1 3/8 1P DE 24V	3/8" BSP	24 VDC	D.E.	45	250	1	93,5	73
YE45/2 3/8 2P DD	3/8" BSP	12 VDC	D-D	45	250	2	130,5	110
YE45/2 3/8 2P DD 24V	3/8" BSP	24 VDC	D-D	45	250	2	130,5	110
YE45/3 3/8 3P DDD	3/8" BSP	12 VDC	D-D-D	45	250	3	165,5	147
YE45/3 3/8 3P DDD 24V	3/8" BSP	24 VDC	D-D-D	45	250	3	165,5	147
YE45/4 3/8 4P DDDD	3/8" BSP	12 VDC	D-D-D-D	45	250	4	202,5	184
YE45/4 3/8 4P DDDD 24V	3/8" BSP	24 VDC	D-D-D-D	45	250	4	202,5	184
YE45/5 3/8 5P DDDDD	3/8" BSP	12 VDC	D-D-D-D-D	45	250	5	239,5	221
YE45/5 3/8 5P DDDDD 24V	3/8" BSP	24 VDC	D-D-D-D-D	45	250	5	239,5	221
YE45/6 3/8 6P DDDDDD	3/8" BSP	12 VDC	D-D-D-D-D-D	45	250	6	276,5	258
YE45/6 3/8 6P DDDDDD 24V	3/8" BSP	24 VDC	D-D-D-D-D-D	45	250	6	276,5	258

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.