
Electrical clutches without splined half-coupling



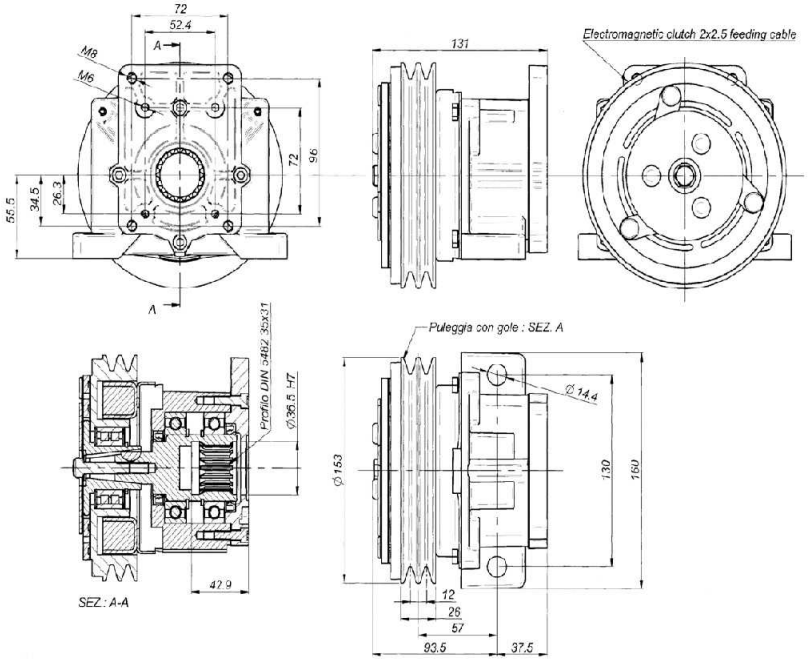

Mnom (a 12/24V, +-0,5%) 102 Nm (pulley Ø152,4 - 2 ways)

Pump: Group 1-2

Splined half-coupling: FII-FIII (FI-FIII CONSULT)

Type of oil TIPO ISO 19378:2003
VISCOSIDAD ISO VG 150 (ISO 3448:1992)
0.07L

Part nº	Voltage (V)	Max. torque	R.P.M.
EE10-12	12 VDC	10 daNm	2000
EE10-24	24 VDC	10 daNm	2000

***** Review attached PDF*****
*R.P.M.=Máx. speed
Reversible rotation

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.